

由于我们在不断努力改进产品，我们保留样本数据更改的权利，敬请谅解。

As we are constantly endeavouring to improve the performance of our equipment.

The company reserves the right to make alteration from time to time and equipment differ from that detailed in this brochure.



SLD单吸多级节段式离心泵

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP



上海连成(集团)有限公司
SHANGHAI LIANCHENG (GROUP) CO.,LTD.

地址：上海市江桥曹安公路3616—3618号

邮编：201812

总机：(021) 59138888

传真：(021) 59136782

800免费咨询电话：800-820-5009

400免费咨询电话：400-188-5009

Address:3616-3618 Cao'an Road, Jiangqiao Shanghai


P.C.: 201812

Switchboard: (021) 59138888

Fax: (021) 59136782

800 Free consultation Tel:800-820-5009

400 Free consultation Tel : 400-188-5009

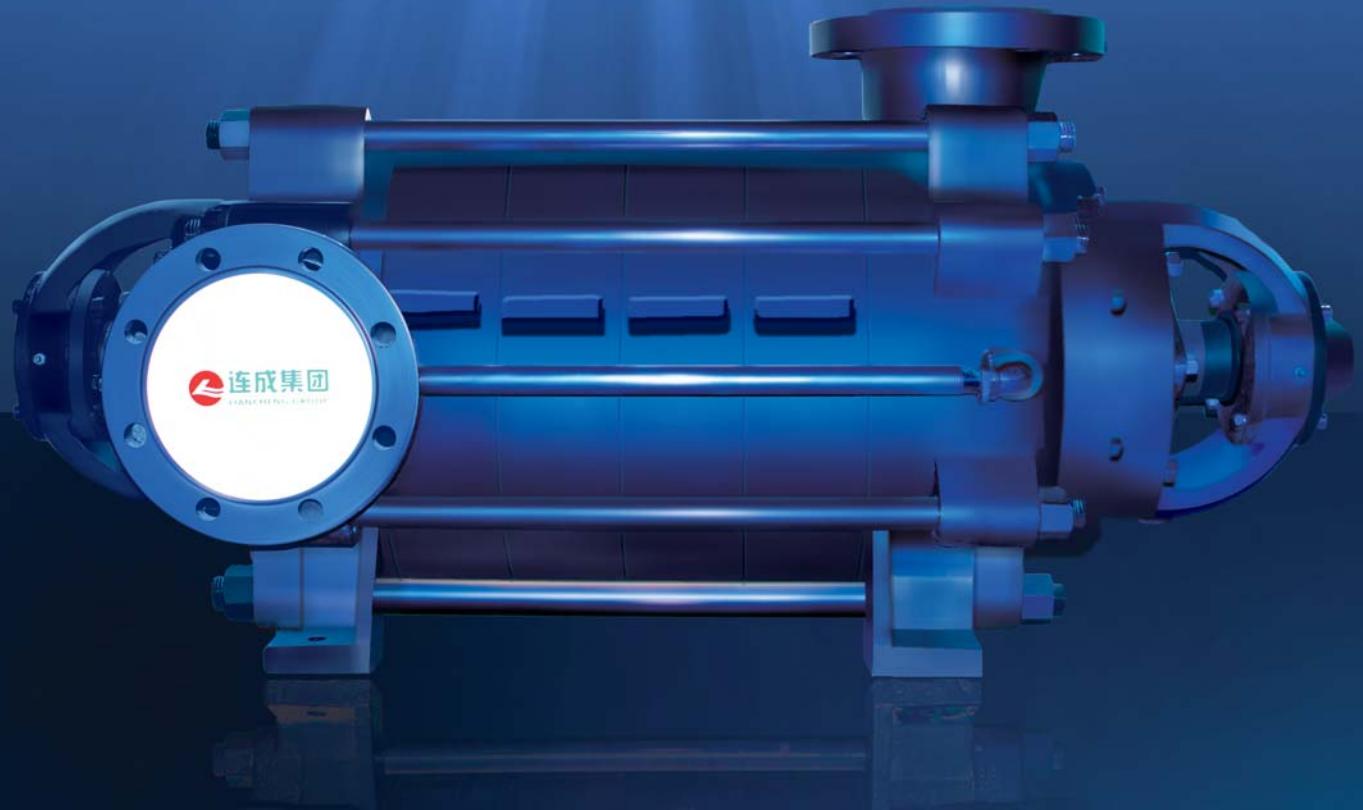

目 录

CONTENTS

概 述 Outline	1
性能范围 Range of performance	1
型号意义 Model meaning	1
安装高度的计算 Calculation of the erection height	1
结构说明 Description of structure	2
SLD型泵结构图 Structural drawing of model SLD pump	3
SLD型泵主要技术规范 Main technical regime of model SLD pump	6
SLD型泵的外形及安装尺寸 External and erection dimensions of model SLD pump	29
管路损耗参考表 Reference table for pipeline loss	36

概 述 Outline

SLD单吸多级节段式离心泵，供输送不含固体颗粒的清水及物理化学性质类似于清水的液体，液体的温度不超过80℃，适合于矿山、工厂及城市给排水用。

注：在煤矿井下使用时，须用隔爆型电机。
本系列泵符合GB/T3216、GB/T5657标准。

SLD single-suction multi-stage sectional-type centrifugal pump is used to transport the pure water containing no solid grains and the liquid with both physical and chemical natures similar to those of pure water, the temperature of the liquid is not over 80℃, suitable for water supply and drainage in mines, factories and cities.

Note: Use an explosion-proof motor when used in a coal well.
This series pump comply with the standards of GB/T3216 and GB/T5657.

性能范围 Range of performance


流量(Q) 25-500 m³/h

扬程(H) 60-1798 m

Capacity(Q) 25-500 m³/h

Head(H) 60-1798 m

型号意义 Model meaning

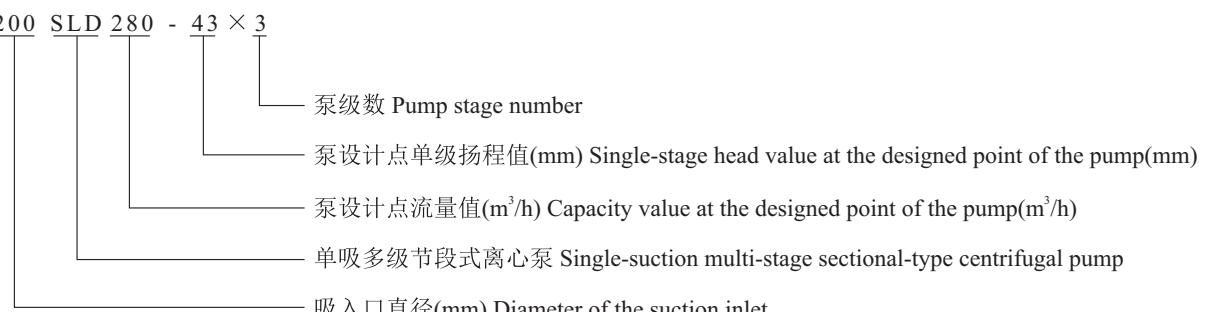

安装高度的计算 Calculation of the erection height

用户在选用水泵时，应考虑泵的安装高度，即被吸液面至水泵轴的垂直距离要小于水泵规定的安装高度，水泵规定的安装高度按下式计算：

$$HSZ \leq Ha - Hv - \Delta Hs - (NPSH)r$$

式中：Hsz-水泵规定的安装高度(m)

Ha-使用现场条件下的大气压力水头(m)

Hv-抽送液体温度下的汽化压力水头(m)

△Hs-吸入管路损失水头(m)

(NPSH)r-性能参数表上给定的必需汽蚀余量值(m)

The erection height of the pump, that is the vertical distance from the sucked liquid surface to the pump shaft should be less than it which should be taken into consideration for users to select the pump, is calculated per the following formula:

$$Hsz \leq Ha - Hv - \Delta Hs - (NPSH)r$$

Of which:

Hsz-- the erection height set with the pump(m)

Ha-- the head of the atmospheric pressure under the conditions on the spot of use(m)

Hv-- the head of the vapourized pressure under the temperature of the liquid being pumped(m)

△Hs-- the lost head of the suck-in pipeline(m)

(NPSH)r-- the necessary value of NPSH given in the table of performance parameters(m)

结构说明 Description of structure

SLD型泵主要由定子、转子、轴承和轴封四大部分组成：

1.定子部分 主要由吸入段、中段、吐出段、导叶等组成，用拉紧螺栓将各段夹紧，构成工作室。SLD型泵吸入口为水平方向，出口垂直向上。

2.转子部分 主要由轴、叶轮、平衡盘和轴套等组成。轴将动力传递给叶轮使其工作；平衡盘用来平衡轴向力；轴的两端装有可更换的轴套用来保护轴。

3.轴承部分有滚动轴承和滑动轴承两种：

滚动轴承主要由轴承座体、轴承和轴承压盖等组成，采用油脂润滑。

滑动轴承主要由轴承体、轴承盖、轴瓦、防尘盘、油位计、甩油环等组成，采用稀油润滑。

4.轴封采用填料密封，主要由进水段和尾盖上的密封函体、填料、挡水圈组成。密封工作室内的液体，起水封、水冷和水润滑作用。水封水来源于泵内压力水。根据用户需要，也可配机械密封。

另外，泵通过弹性联柱销轴器由原动机直接驱动。从原动机端看泵，泵为顺时针方向旋转。

Model SLD pump consists of four parts, stator, rotor, bearing and shaft seal:

1. Stator consists of inlet, middle and outlet sections and the guide vane etc., with the take-up bolt tightly clamping all sections to form a working room. The inlet of it stands horizontally while the outlet vertically upward.

2. Rotor consists of the shaft, impeller, balancing disk and muff etc., the shaft passes the power to the impeller to have it work; the balancing disk balances the axial force; and replaceable muff is mounted on both sides of the shaft to protect it.

3. There are rolling and sliding bearings:


The rolling bearing consists of bearing seat, bearing and bearing gland and uses grease for lubrication.

The sliding bearing consists of bearing body and cover, liner, dust-proof disk, oil leveller, oil throwing ring etc., and uses thinned oil for lubrication.

4. The shaft is sealed with stuffing and the shaft seal consists of the sealing contents, stuffing, baffle. The liquid in the sealing work-room functions water-sealing, water-cooling and water lubricating and the water for water-sealing comes from the pressure water inside of the pump. A mechanical seal can also be used upon the requirement from users.

In addition, the pump is directly actuated by the prime mover through the elastic clutch and, viewing from the prime mover, moves CW.

SLD型泵结构图 Structural drawing of model SLD pump

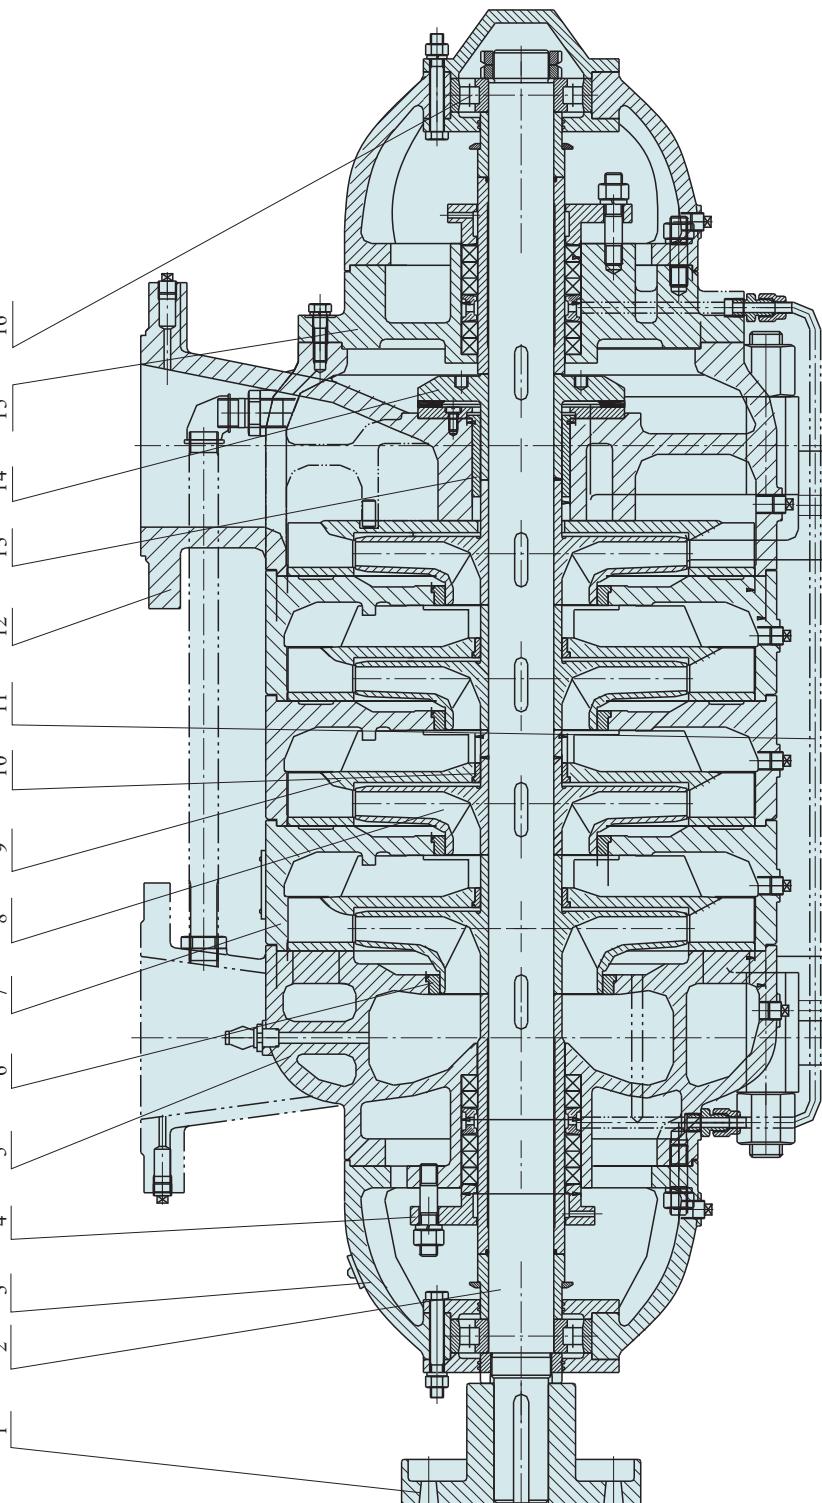


图一 用滚动轴承支撑 Fig.1 Supported with the rolling bearing

SLD6-25、SLD12-25、SLD25-30、SLD25-50、SLD46-30、SLD46-50、SLD85-45、SLD85-67(3级~6级)、SLD155-30、SLD155-67(3级~6级)、

SLD280-43、SLD280-65、SLD360-50、SLD450-60、SLD500-57、SLD600-60、SLD720-60

1	联轴器部件 Clutch part	3	轴承体部件 Bearing body	5	吸入段 Inlet section	7	中段 Middle-section	9	导叶 Guide vane	11	水封管部件 Water-sealing pipe-part	13	平衡套 Balancing sleeve	15	填料函体 Stuffing content
2	轴 Shaft	4	填料压盖 Stuffing gland	6	密封环 Seal-ring	8	叶轮 Impeller	10	导叶套 Guide vane sleeve	12	吐出段 Outlet section	14	平衡盘 Balancing disk	16	轴承 Bearing

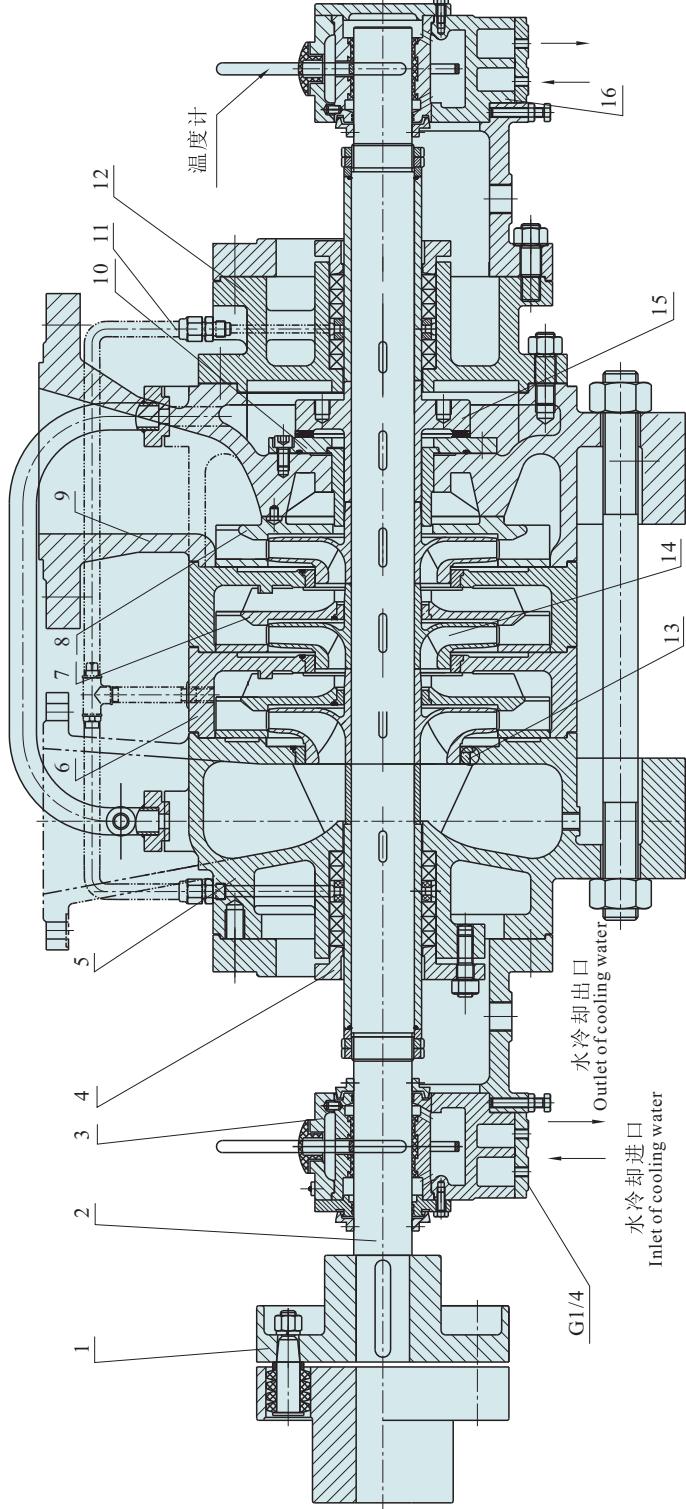
SLD型泵结构图 Structural drawing of model SLD pump


SLD85-67(7级~9级)、SLD 85-80、SLD150-100、SLD155-67(7级~9级)、SLD280-100、SLD420-93

图二 用滑动轴承支承 Fig.2 Supported with the sliding bearing

1	联轴器部件 Clutch part	3	前轴承部件 Bearing part	5	吸入段 Inlet section	7	导叶 Guide vane	9	吐出段 Outlet section	11	水封管部件 Water-sealing pipe part	13	密封环 Seal-ring	15	平衡盘 Balancing disk
2	轴 Shaft	4	填料压盖 Stuffing gland	6	中段 Middle-section	8	末级导叶 Final-stage guide vane	10	平衡环 Balancing ring	12	填料函体 Stuffing content	14	叶轮 Impeller	16	后轴承部件 Bearing part

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP

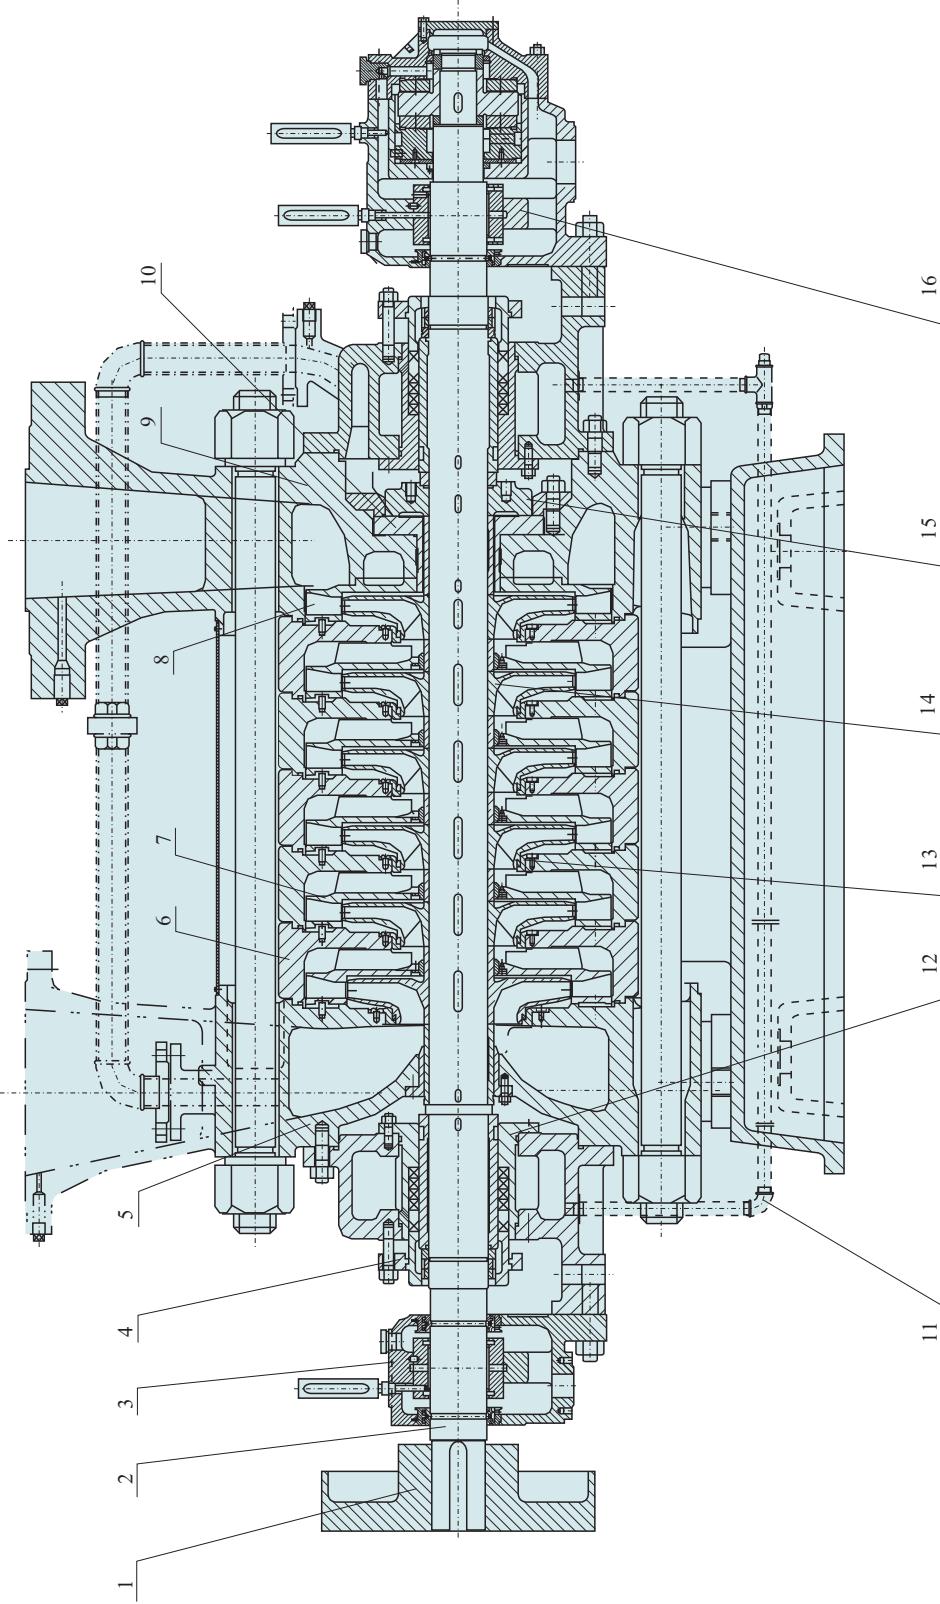SLD型泵结构图 Structural drawing of model SLD pump


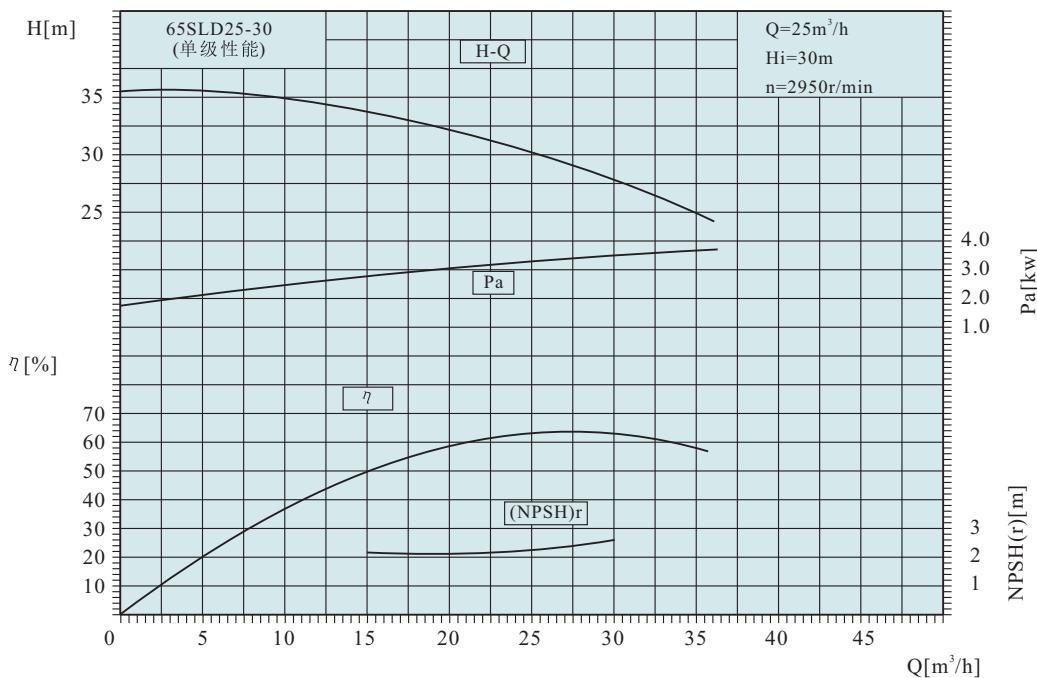
SLD250-150、SLD250-150(A)、SLD300-150、SLD300-150(A)

图三 用滑动轴承支承(强制润滑) Fig.3 Supported with the sliding bearing (forced lubrication)


1	联轴器部件 Clutch part	3	前轴承部件 Bearing part	5	吸入段 Inlet section	7	导叶 Guide vane	9	吐出段 Outlet section	11	水封管部件 Water-sealing pipe part	13	密封环 Seal-ring	15	平衡盘 Balancing disk
2	轴 Shaft	4	填料压盖部件 Stuffing gland part	6	中段 Middle-section	8	末级导叶 Final-stage guide vane	10	平衡环 Balancing ring	12	填料函体 Stuffing content	14	叶轮 Impeller	16	后轴承部件 Bearing part

SLD型泵主要技术规范 Main technical regime of model SLD pump

65SLD25-30型泵单级性能曲线图 Single-stage performance curve diagram of model 65SLD25-30pump


SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP
SLD型泵主要技术规范 Main technical regime of model SLD pump

65SLD25-50型泵单级性能曲线图 Single-stage performance curve diagram of model 65SLD25-50pump

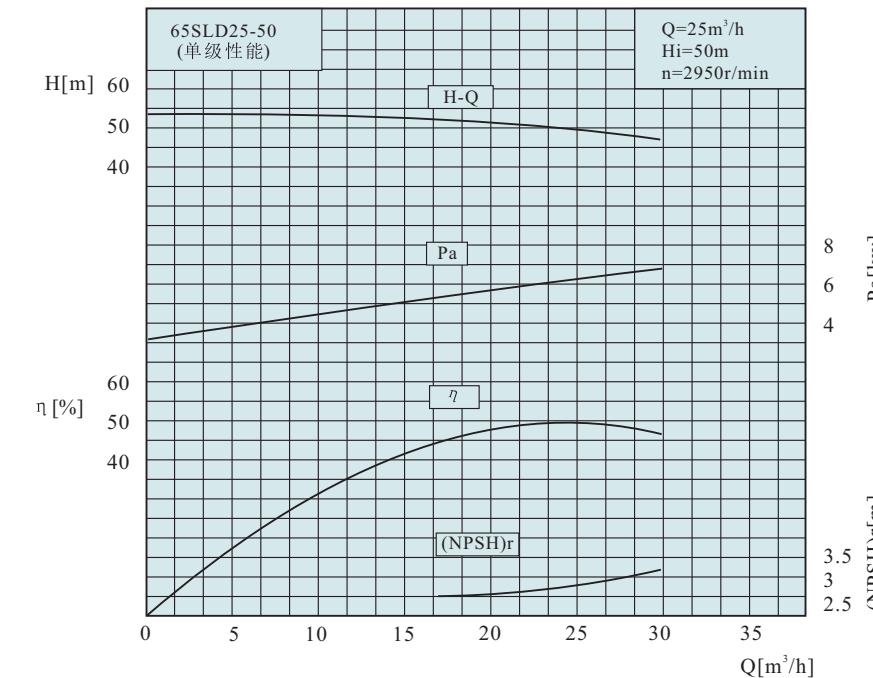
65SLD25-30型多级水泵性能表 Performance table of model 65SLD25-30 multi-stage water pump


级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
3	15	4.17	102	2950	8.33	15.0	50	2.2	215
	25	6.94	90		9.88	62	62	2.2	
	30	8.33	83		10.70	63	63	2.6	
4	15	4.17	136	2950	11.11	18.5	50	2.2	240
	25	6.94	120		13.10	62	62	2.2	
	30	8.33	110		14.26	63	63	2.6	
5	15	4.17	170	2950	13.89	22.0	50	2.2	265
	25	6.94	150		16.47	62	62	2.2	
	30	8.33	138		17.83	63	63	2.6	
6	15	4.17	204	2950	16.67	30.0	50	2.2	290
	25	6.94	180		19.77	62	62	2.2	
	30	8.33	165		21.40	63	63	2.6	
7	15	4.17	238	2950	19.44	30.0	50	2.2	315
	25	6.94	210		23.10	62	62	2.2	
	30	8.33	193		24.96	63	63	2.6	
8	15	4.17	272	2950	22.22	37.0	50	2.2	340
	25	6.94	240		26.40	62	62	2.2	
	30	8.33	220		28.53	63	63	2.6	
9	15	4.17	306	2950	25.00	37.0	50	2.2	365
	25	6.94	270		29.65	62	62	2.2	
	30	8.33	248		32.10	63	63	2.6	
10	15	4.17	340	2950	27.80	45.0	50	2.2	390
	25	6.94	300		32.90	62	62	2.2	
	30	8.33	275		35.70	63	63	2.6	

65SLD25-50型多级水泵性能表 Performance table of model 65SLD25-50 multi-stage water pump


级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
3	15	4.17	4.17	2950	15.78	22	42	2.5	290
	25	6.94	6.94		18.91		48	2.8	
	30	8.33	8.33		20.64		46	3.2	
4	15	4.17	4.17	2950	21.04	30	42	2.5	310
	25	6.94	6.94		25.22		48	2.8	
	30	8.33	8.33		27.5		46	3.2	
5	15	4.17	4.17	2950	26.2	37	42	2.5	330
	25	6.94	6.94		31.52		48	2.8	
	30	8.33	8.33		34.40		46	3.2	
6	15	4.17	4.17	2950	31.56	45	42	2.5	355
	25	6.94	6.94		37.82		48	2.8	
	30	8.33	8.33		41.28		46	3.2	
7	15	4.17	4.17	2950	38.86	55	42	2.5	372
	25	6.94	6.94		44.1		48	2.8	
	30	8.33	8.33		48.16		46	3.2	
8	15	4.17	4.17	2950	42	75	42	2.5	390
	25	6.94	6.94		50.45		48	2.8	
	30	8.33	8.33		55.04		46	3.2	
9	15	4.17	4.17	2950	47.33	75	42	2.5	415
	25	6.94	6.94		56.74		48	2.8	
	30	8.33	8.33		61.92		46	3.2	
10	15	4.17	4.17	2950	52.59	75	42	2.5	433
	25	6.94	6.94		63.04		48	2.8	
	30	8.33	8.33		68.8		46	3.2	
11	15	4.17	4.17	2950	57.8	90	42	2.5	450
	25	6.94	6.94		69.3		48	2.8	
	30	8.33	8.33		75.68		46	3.2	
12	15	4.17	4.17	2950	63.11	110	42	2.5	468
	25	6.94	6.94		75.65		48	2.8	
	30	8.33	8.33		82.56		46	3.2	

SLD型泵主要技术规范 Main technical regime of model SLD pump

80SLD46-30型泵单级性能曲线图 Single-stage performance curve diagram of model 80SLD46-30 pump

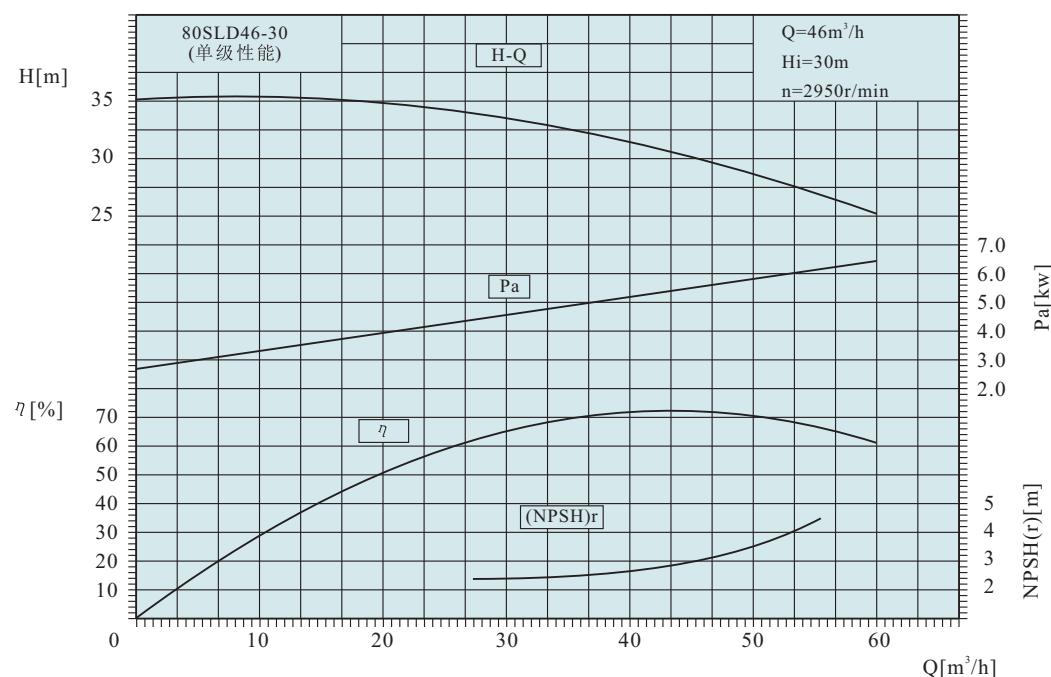
SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP
SLD型泵主要技术规范 Main technical regime of model SLD pump

80SLD46-50型泵单级性能曲线图 Single-stage performance curve diagram of model 80SLD46-50 pump

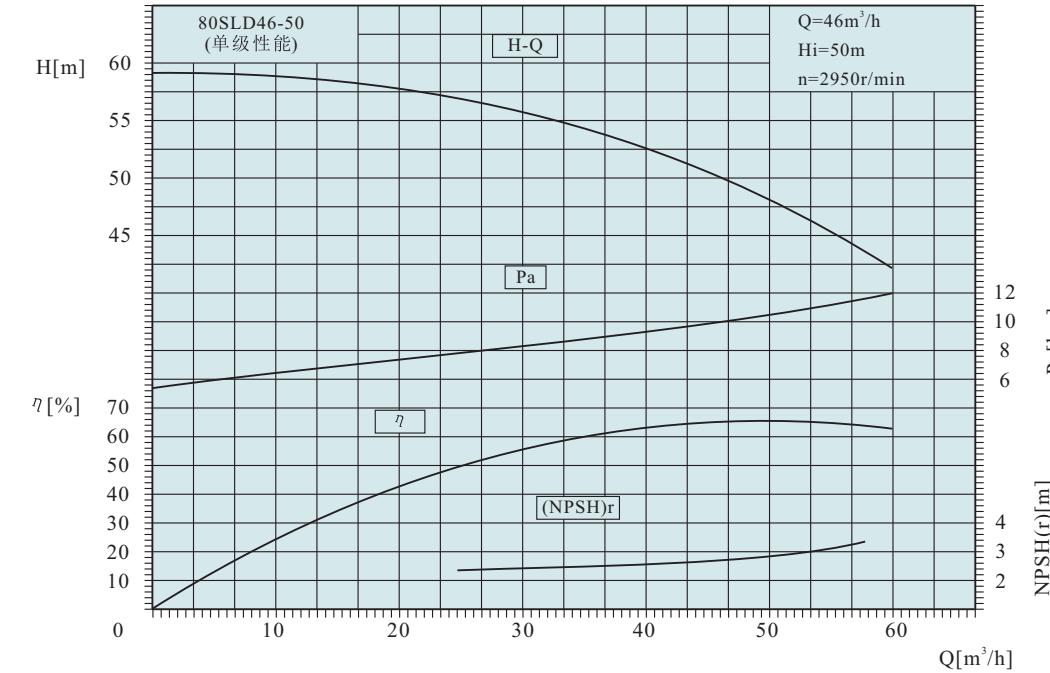
80SLD46-30型多级水泵性能表 Performance table of model 80SLD46-30 multi-stage water pump


级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m ³ /h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
3	30	8.33	102	2950	13.02	22	64	2.4	210
	46	12.8	90		16.11		70	3.0	
	55	15.3	81		17.84		78	4.6	
4	30	8.33	136	2950	17.36	30	64	2.4	236
	46	12.8	120		21.48		70	3.0	
	55	15.3	108		23.79		78	4.6	
5	30	8.33	170	2950	21.7	37	64	2.4	261
	46	12.8	150		26.85		70	3.0	
	55	15.3	135		29.74		78	4.6	
6	30	8.33	204	2950	26.04	37	64	2.4	286
	46	12.8	180		32.21		70	3.0	
	55	15.3	162		35.68		78	4.6	
7	30	8.33	238	2950	30.38	45	64	2.4	311
	46	12.8	210		37.58		70	3.0	
	55	15.3	189		41.63		78	4.6	
8	30	8.33	274	2950	34.72	55	64	2.4	336
	46	12.8	240		42.95		70	3.0	
	55	15.3	216		47.58		78	4.6	
9	30	8.33	306	2950	39.06	55	64	2.4	362
	46	12.8	270		48.32		70	3.0	
	55	15.3	243		53.53		78	4.6	
10	30	8.33	340	2950	43.4	75	64	2.4	388
	46	12.8	300		53.69		70	3.0	
	55	15.3	270		59.47		78	4.6	

80SLD46-50型多级水泵性能表 Performance table of model 80SLD46-50 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m ³ /h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
3	30	8.33	166.5	2950	8.33	25.19	37	2.5	357
	46	12.8			12.8	29.83		2.8	
	55	15.3			15.3	32.3		3.2	
4	30	8.33	222	2950	8.33	33.59	45	2.5	390
	46	12.8			200	39.77		2.8	
	55	15.3			184	43.06		3.2	
5	30	8.33	277.5	2950	8.33	41.98	55	2.5	423
	46	12.8			250	49.72		2.8	
	55	15.3			230	53.83		3.2	
6	30	8.33	330	2950	8.33	50.38	75	2.5	455
	46	12.8			300	59.65		2.8	
	55	15.3			276	64.59		3.2	
7	30	8.33	388.5	2950	8.33	58.78	90	2.5	488
	46	12.8			350	69.6		2.8	
	55	15.3			322	75.36		3.2	
8	30	8.33	440	2950	8.33	67.18	90	2.5	521
	46	12.8			400	79.54		2.8	
	55	15.3			368	86.12		3.2	
9	30	8.33	499.5	2950	8.33	75.57	110	2.5	554
	46	12.8			450	89.48		2.8	
	55	15.3			414	96.89		3.2	
10	30	8.33	555	2950	8.33	83.97	110	2.5	586
	46	12.8			500	99.42		2.8	
	55	15.3			460	107.66		3.2	
11	30	8.33	610.5	2950	8.33	92.37	132	2.5	619
	46	12.8			550	109.36		2.8	
	55	15.3			506	118.42		3.2	
12	30	8.33	666	2950	8.33	100.8	132	2.5	652
	46	12.8			600	119.3		2.8	
	55	15.3			552	129.2		3.2	

SLD型泵主要技术规范 Main technical regime of model SLD pump

100SLD85-45型泵单级性能曲线图 Single-stage performance curve diagram of model 100SLD85-45 pump

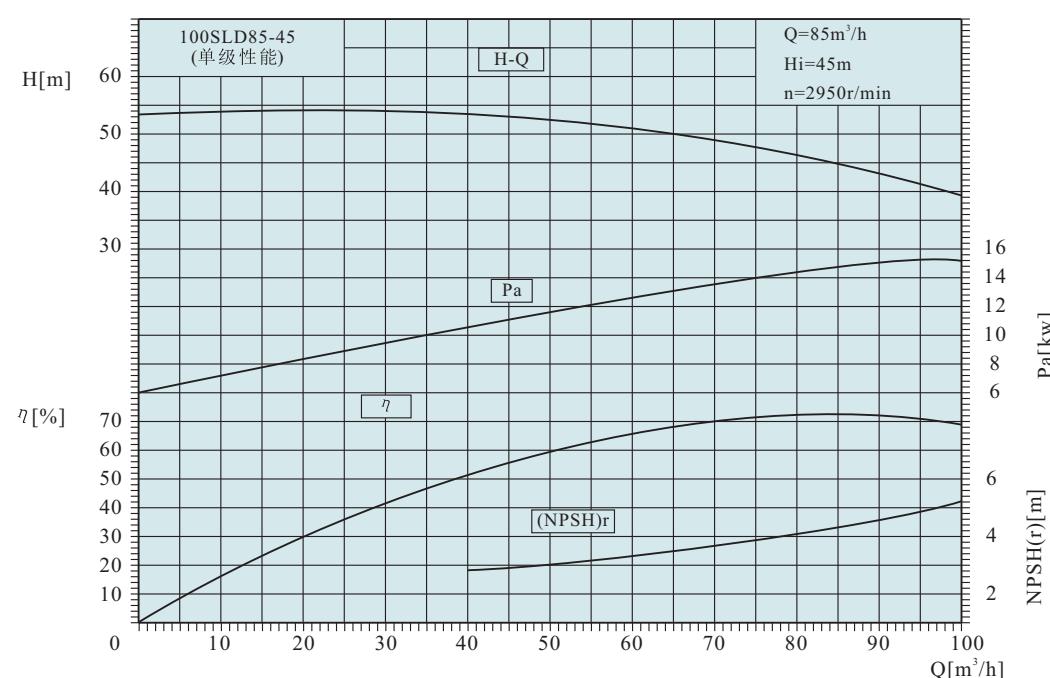


100SLD85-45型多级水泵性能表 Performance table of model 100SLD85-45 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m ³ /h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
2	55	15.3	102	2950	24.25	37	63	3.2	270
	85	23.6	90		28.94		72	4.2	
	100	27.8	78		30.35		70	5.2	
3	55	15.3	153	2950	36.38	55	63	3.2	385
	85	23.6	135		43.4		72	4.2	
	100	27.8	117		45.53		70	5.2	
4	55	15.3	204	2950	48.5	75	63	3.2	480
	85	23.6	180		57.87		72	4.2	
	100	27.8	156		60.7		70	5.2	
5	55	15.3	255	2950	60.63	90	63	3.2	540
	85	23.6	225		72.34		72	4.2	
	100	27.8	195		75.86		70	5.2	
6	55	15.3	306	2950	72.75	110	63	3.2	865
	85	23.6	270		86.81		72	4.2	
	100	27.8	234		91.04		70	5.2	
7	55	15.3	357	2950	84.88	132	63	3.2	950
	85	23.6	315		101.3		72	4.2	
	100	27.8	273		106.2		70	5.2	
8	55	15.3	408	2950	97.0	132	63	3.2	1035
	85	23.6	360		115.7		72	4.2	
	100	27.8	312		121.4		70	5.2	
9	55	15.3	459	2950	109.1	160	63	3.2	1120
	85	23.6	405		130.2		72	4.2	
	100	27.8	351		136.6		70	5.2	

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP

SLD型泵主要技术规范 Main technical regime of model SLD pump

100SLD85-67型泵单级性能曲线图 Single-stage performance curve diagram of model 100SLD85-67 pump

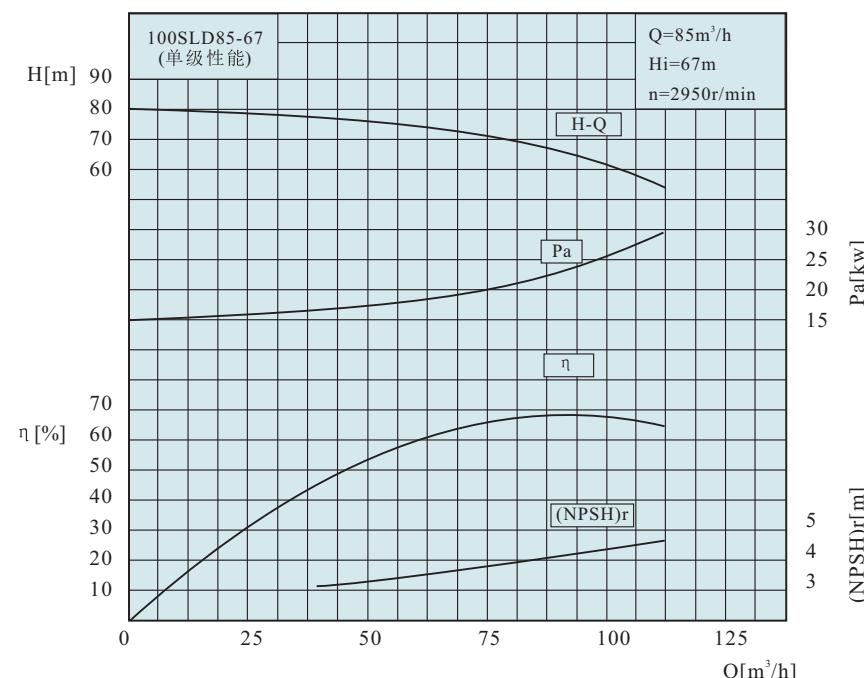


100SLD85-67型多级水泵性能表 Performance table of model 100SLD85-67 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m ³ /h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
3	55	15.3	222	2950	58.3	90	57	3.3	652
	85	23.6	201		68.4		68	4.0	
	100	27.8	183		73.3		68	4.4	
4	55	15.3	296	2950	77.8	110	57	3.3	724
	85	23.6	268		91.2		68	4.0	
	100	27.8	244		97.8		68	4.4	
5	55	15.3	370	2950	97.3	132	57	3.3	845
	85	23.6	335		114		68	4.0	
	100	27.8	305		122.2		68	4.4	
6	55	15.3	444	2950	116.7	160	57	3.3	1135
	85	23.6	402		136.9		68	4.0	
	100	27.8	366		146.7		68	4.4	
7	55	15.3	518	2950	136.2	200	57	3.3	1258
	85	23.6	469		159.6		68	4.0	
	100	27.8	427		171.1		68	4.4	
8	55	15.3	592	2950	155.6	220	57	3.3	1400
	85	23.6	536		182.4		68	4.0	
	100	27.8	488		195.5		68	4.4	
9	55	15.3	666	2950	175.1	250	57	3.3	1560
	85	23.6	603		205.2		68	4.0	
	100	27.8	549		220.0		68	4.4	

SLD型泵主要技术规范 Main technical regime of model SLD pump

100SLD85-80型泵单级性能曲线图 Single-stage performance curve diagram of model 100SLD85-80 pump

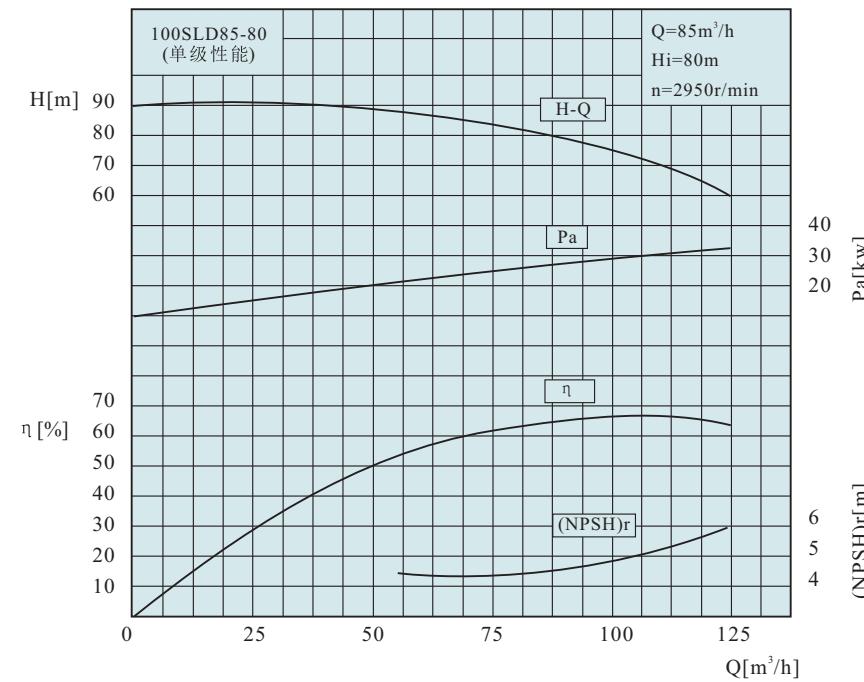


100SLD85-80型多级水泵性能表 Performance table of model 100SLD85-80 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
3	54	15.0	264 240 210	2950	73.2	110	53	4.5	925
	85	23.6			85.4		65	4.4	
	108	30.0			93.5		66	5.3	
4	54	15.0	352 320 280	2950	97.6	132	53	4.5	1012
	85	23.6			113.9		65	4.4	
	108	30.0			124.7		66	5.3	
5	54	15.0	440 400 350	2950	122.0	160	53	4.5	1100
	85	23.6			142.3		65	4.4	
	108	30.0			160.0		66	5.3	
6	54	15.0	528 480 420	2950	146.4	200	53	4.5	1186
	85	23.6			170.8		65	4.4	
	108	30.0			187.1		66	5.3	
7	54	15.0	616 560 490	2950	170.9	250	53	4.5	1274
	85	23.6			199.3		65	4.4	
	108	30.0			218.4		66	5.3	
8	54	15.0	704 640 560	2950	195.3	280	53	4.5	1361
	85	23.6			227.8		65	4.4	
	108	30.0			249.6		66	5.3	
9	54	15.0	792 720 630	2950	219.8	315	53	4.5	1448
	85	23.6			256.3		65	4.4	
	108	30.0			280.7		66	5.3	
10	54	15.0	880 800 700	2950	244.2	355	53	4.5	1535
	85	23.6			284.8		65	4.4	
	108	30.0			311.9		66	5.3	
11	54	15.0	968 880 770	2950	268.6	400	53	4.5	1622
	85	23.6			313.2		65	4.4	
	108	30.0			343		66	5.3	
12	54	15.0	1056 960 840	2950	292.8	400	53	4.5	1710
	85	23.6			341.7		65	4.4	
	108	30.0			374.3		66	5.3	

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP

200SLD150-100型泵单级性能曲线图 Single-stage performance curve diagram of model 200SLD150-100 pump

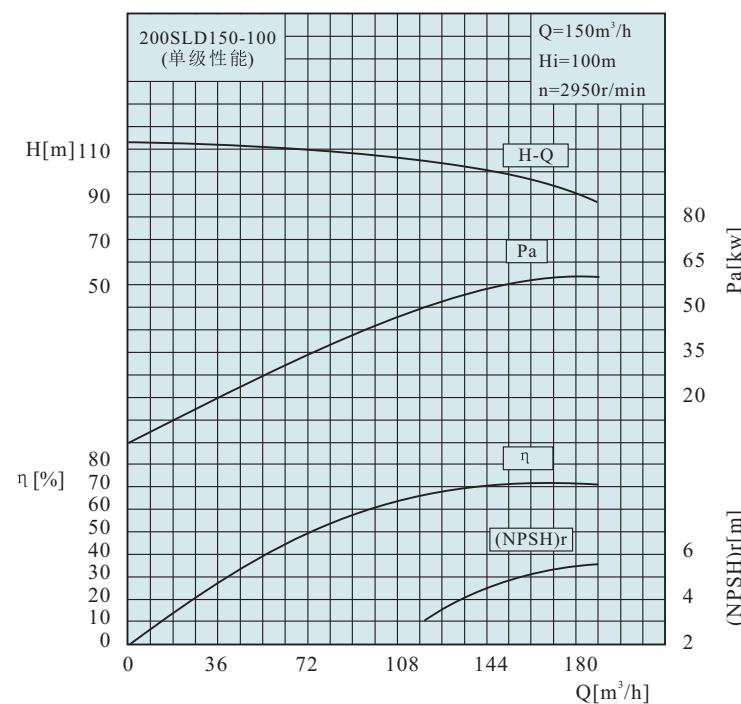


200SLD150-100型多级水泵性能表 Performance table of model 200SLD150-100 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
3	120	33.3	315 300 270	2950	153	220	67	3.4	2285
	150	41.7			175		70		
	180	50.0			184		72		
4	120	33.3	420 400 360	2950	205	280	67	3.4	2435
	150	41.7			234		70		
	180	50.0			245		72		
5	120	33.3	525 500 450	2950	256	355	67	3.4	2585
	150	41.7			292		70		
	180	50.0			306		72		
6	120	33.3	630 600 540	2950	307	450	67	3.4	2735
	150	41.7			353		70		
	180	50.0			368		72		
7	120	33.3	735 700 630	2950	358	500	67	3.4	2885
	150	41.7			412		70		
	180	50.0			429		72		
8	120	33.3	840 800 720	2950	409	560	67	3.4	

SLD型泵主要技术规范 Main technical regime of model SLD pump

150SLD155-30型泵单级性能曲线图 Single-stage performance curve diagram of model 150SLD155-30 pump

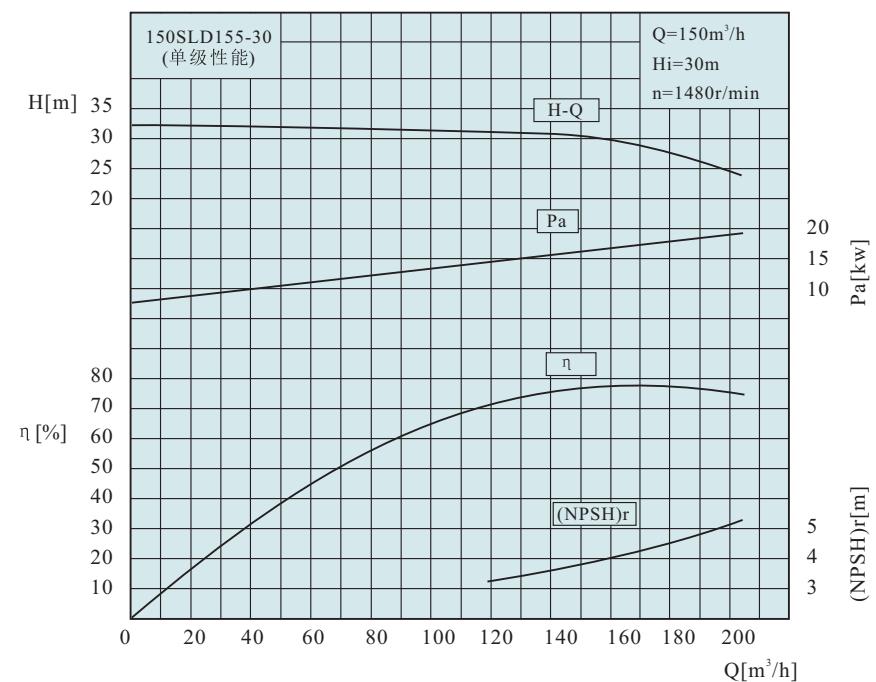


150SLD155-30型多级水泵性能表 Performance table of model 150SLD155-30 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
2	119	33	64	1480	28.76	55	72.0	3.2	630
	155	43	60		32.84		77.0	3.9	
	190	53	54		36.68		76.5	4.8	
3	119	33	96	1480	43.14	75	72.0	3.2	750
	155	43	90		49.26		77.0	3.9	
	190	53	81		55.02		76.5	4.8	
4	119	33	128	1480	57.52	90	72.0	3.2	861
	155	43	120		65.68		77.0	3.9	
	190	53	108		73.36		76.5	4.8	
5	119	33	160	1480	71.90	110	72.0	3.2	972
	155	43	150		82.10		77.0	3.9	
	190	53	135		91.70		76.5	4.8	
6	119	33	192	1480	86.28	132	72.0	3.2	1084
	155	43	180		98.52		77.0	3.9	
	190	53	162		110.04		76.5	4.8	
7	119	33	224	1480	100.66	160	72.0	3.2	1195
	155	43	210		114.97		77.0	3.9	
	190	53	189		128.38		76.5	4.8	
8	119	33	256	1480	115.04	160	72.0	3.2	1306
	155	43	240		131.36		77.0	3.9	
	190	53	216		146.72		76.5	4.8	
9	119	33	288	1480	129.42	200	72.0	3.2	1418
	155	43	270		147.78		77.0	3.9	
	190	53	243		165.06		76.5	4.8	
10	119	33	320	1480	143.80	200	72.0	3.2	1529
	155	43	300		164.20		77.0	3.9	
	190	53	270		183.40		76.5	4.8	

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP

150SLD155-67型泵单级性能曲线图 Single-stage performance curve diagram of model 150SLD155-67 pump

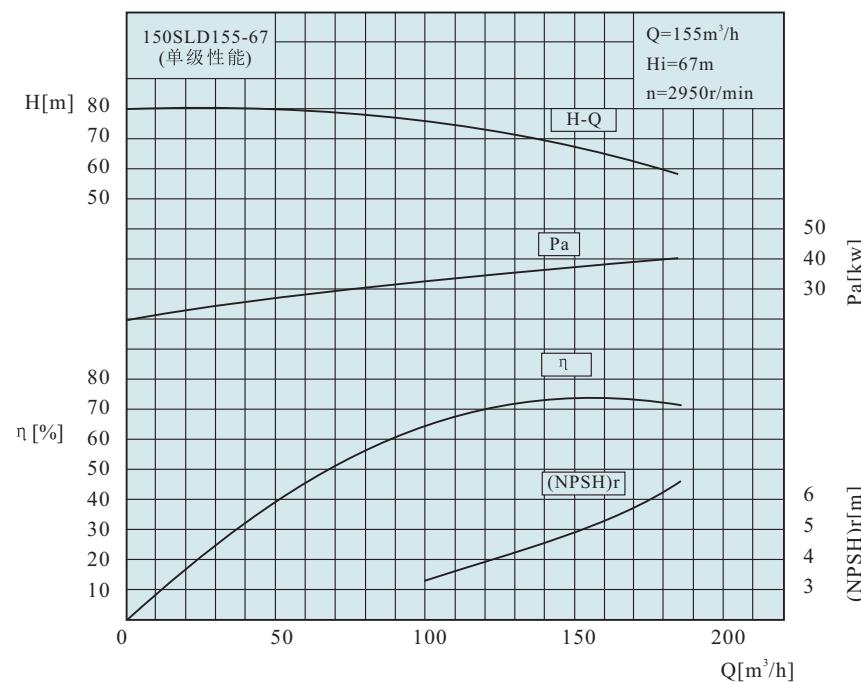


150SLD155-67型多级水泵性能表 Performance table of model 150SLD155-67 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
3	100	27.8	228	2950	97.0	132	64	3.2	774
	155	43			114.7		74	5.0	
	185	51.4			123.9		72	6.6	
4	100	27.8	304	2950	129.4	200	64	3.2	869
	155	43			152.9		74	5.0	
	185	51.4			165.1		72	6.6	
5	100	27.8	380	2950	161.7	220	64	3.2	964
	155	43			191.1		74	5.0	
	185	51.4			206.4		72	6.6	
6	100	27.8	456	2950	194	315	64	3.2	1075
	155	43			229.3		74	5.0	
	185	51.4			247.7		72	6.6	
7	100	27.8	532	2950	226.4	355	64	3.2	1157
	155	43			267.5		74	5.0	
	185	51.4			289		72	6.6	
8	100	27.8	608	2950	258.7	355	64	3.2	1242
	155	43			305.7		74	5.0	
	185	51.4			330.3		72	6.6	
9	100	27.8	684	2950	291.1	450	64	3.2	1320
	155	43			344		74	5.0	
	185	51.4			371.6		72	6.6	

SLD型泵主要技术规范 Main technical regime of model SLD pump

250SLD250-150型泵单级性能曲线图 Single-stage performance curve diagram of model 250SLD250-150 pump

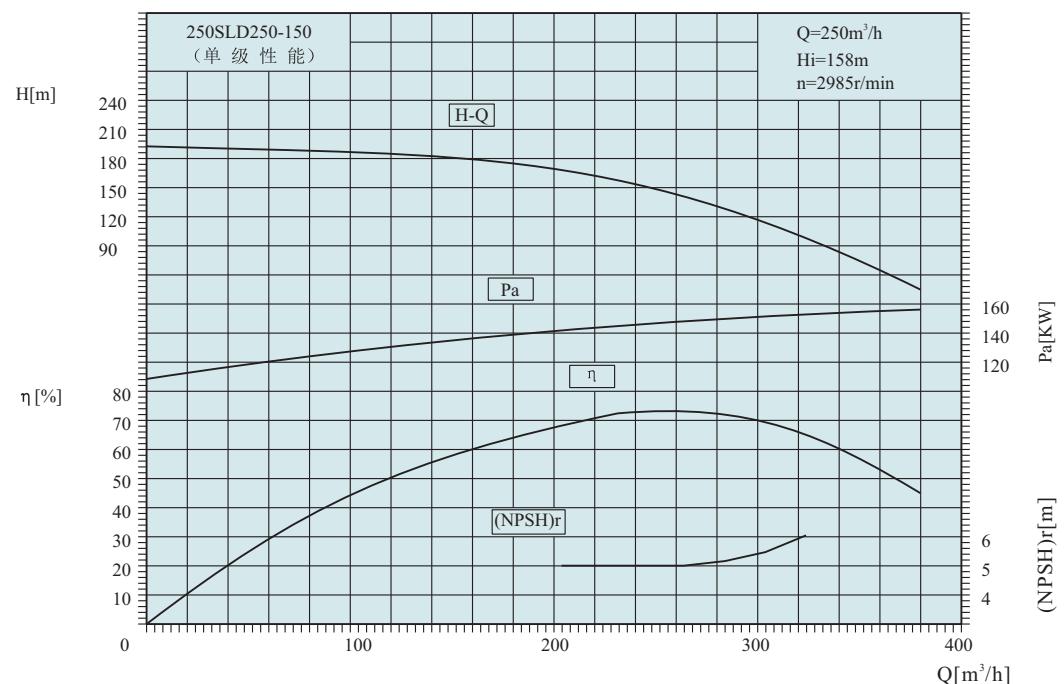


250SLD250-150型多级水泵性能表 Performance table of model 250SLD250-150 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
5	234	65	813	2985	730	900	71	5	3566
	250	69	790		742	760	72		
	277	77	745				74		
6	234	65	976	2985	876	1000	71	5	3803
	250	69	949		891	912	72		
	277	77	894				74		
7	234	65	1138	2985	1021	1250	71	5	4040
	250	69	1107		1040	1064	72		
	277	77	1043				74		
8	234	65	1301	2985	1168	1400	71	5	4278
	250	69	1265		1188	1216	72		
	277	77	1192				74		
9	234	65	1464	2985	1314	1600	71	5	4516
	250	69	1423		1337	1368	72		
	277	77	1341				74		
10	234	65	1627	2985	1460	1800	71	5	4753
	250	69	1581		1485	1520	72		
	277	77	1490				74		
11	234	65	1790	2985	1606	2000	71	5	4987
	250	69	1740		1634	1673	72		
	277	77	1640				74		

需配稀油站

SLD 单吸多级节段式离心泵
SLD型泵主要技术规范 Main technical regime of model SLD pump

250SLD250-150(A)型泵单级性能曲线图 Single-stage performance curve diagram of model 250SLD250-150(A) pump

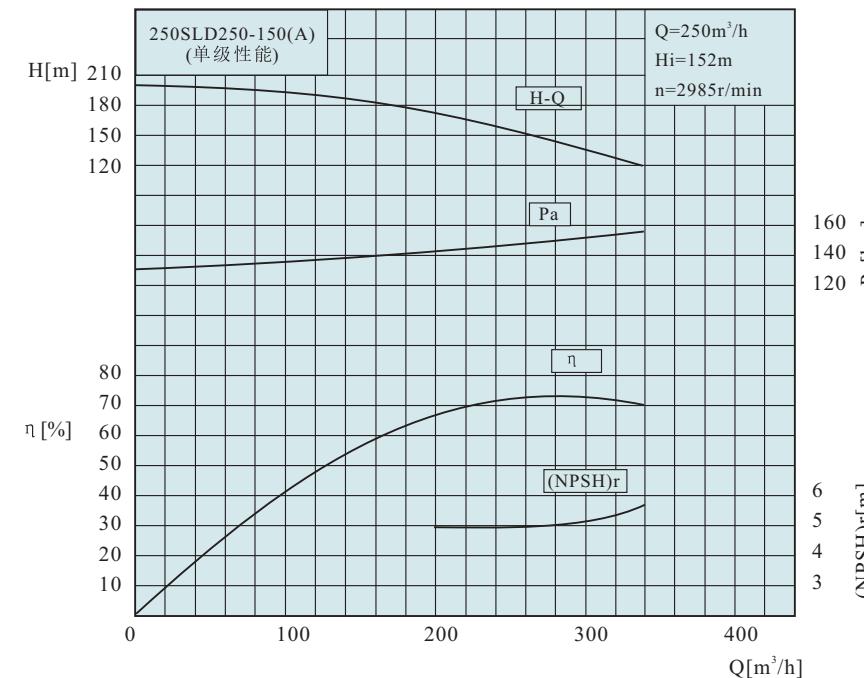


250SLD250-150(A)型多级水泵性能表 Performance table of model 250SLD250-150(A) multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
5	234	65	800	2985	718	900	71	5	3566
	250	69			718	740	72		
	277	77					74		
6	234	65	960	2985	862	1000	71	5	3803
	250	69			861	888	72		
	277	77					74		
7	234	65	1120	2985	1005	1250	71	5	4040
	250	69			1005	1036	72		
	277	77					74		
8	234	65	1280	2985	1149	1400	71	5	4278
	250	69			1149	1184	72		
	277	77					74		
9	234	65	1440	2985	1292	1600	71	5	4516
	250	69			1292	1332	72		
	277	77					74		
10	234	65	1600	2985	1436	1800	71	5	4753
	250	69			1445	1480	72		
	277	77					74		
11	234	65	1760	2985	1580	2000	71	5	4987
	250	69			1580	1628	72		
	277	77					74		

需配稀油站

SLD型泵主要技术规范 Main technical regime of model SLD pump

200SLD280-43型泵单级性能曲线图 Single-stage performance curve diagram of model 200SLD280-43 pump

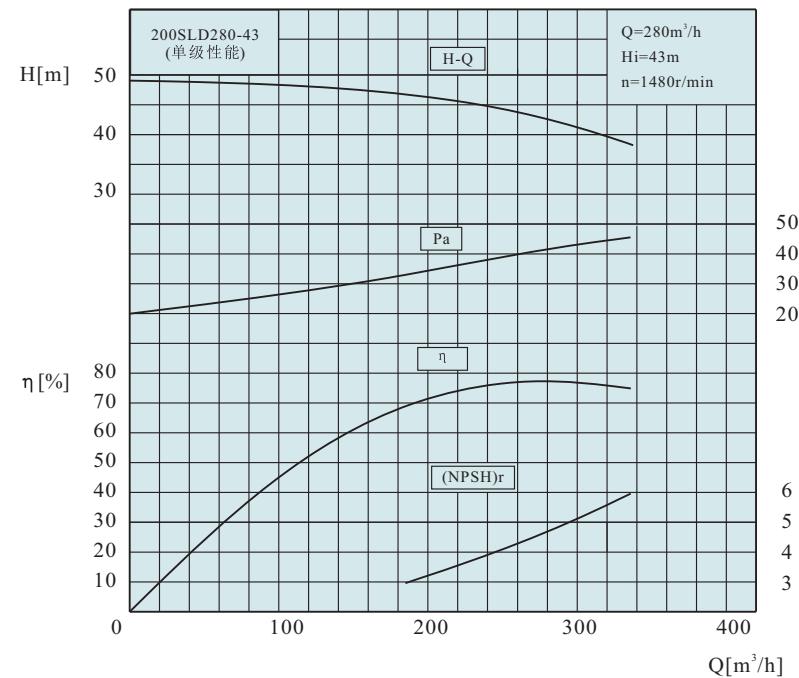


200SLD280-43型多级水泵性能表 Performance table of model 200SLD280-43 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
2	185	51.4	94	1480	68.6	110	69	3.0	1003
	280	77.8	86		85.2		77	4.7	
	335	93.1	76		92.4		75	6.0	
3	185	51.4	141	1480	103.0	160	69	3.0	1205
	280	77.8	129		127.7		77	4.7	
	335	93.1	114		138.7		75	6.0	
4	185	51.4	188	1480	137.3	200	69	3.0	1407
	280	77.8	172		170.3		77	4.7	
	335	93.1	152		184.9		75	6.0	
5	185	51.4	235	1480	171.6	250	69	3.0	1610
	280	77.8	215		212.9		77	4.7	
	335	93.1	190		231.1		75	6.0	
6	185	51.4	282	1480	205.9	315	69	3.0	1812
	280	77.8	258		255.5		77	4.7	
	335	93.1	228		277.3		75	6.0	
7	185	51.4	329	1480	240.2	355	69	3.0	2014
	280	77.8	301		298.1		77	4.7	
	335	93.1	266		323.6		75	6.0	
8	185	51.4	376	1480	274.5	400	69	3.0	2216
	280	77.8	344		340.7		77	4.7	
	335	93.1	304		369.8		75	6.0	
9	185	51.4	423	1480	308.9	450	69	3.0	2418
	280	77.8	387		383.2		77	4.7	
	335	93.1	342		416.0		75	6.0	

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP

200SLD280-65型泵单级性能曲线图 Single-stage performance curve diagram of model 200SLD280-65 pump

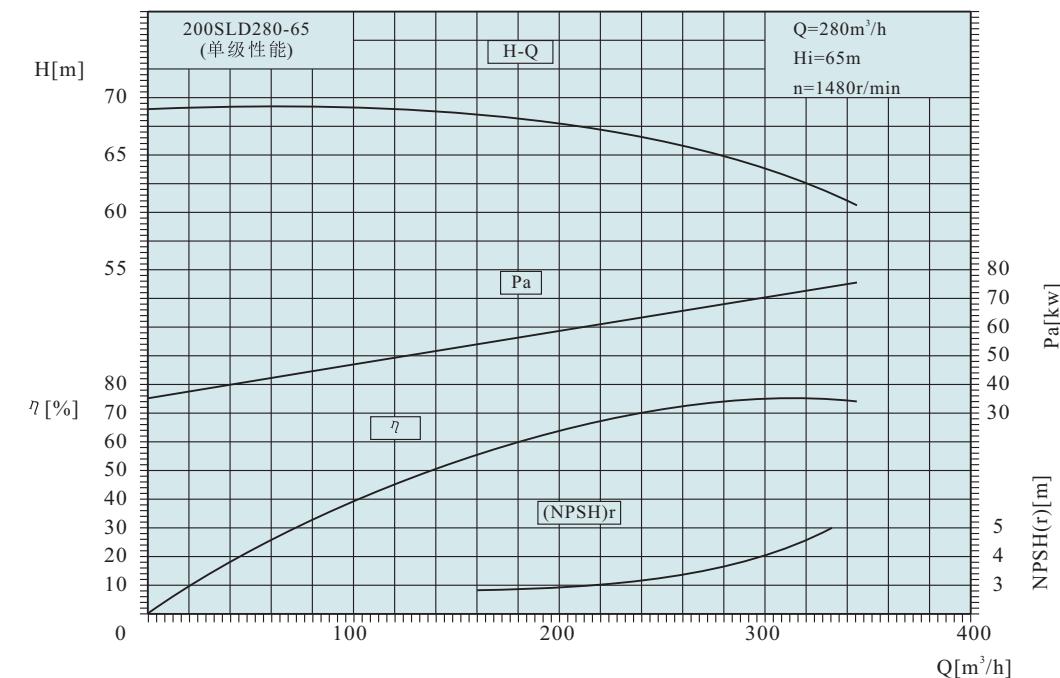


200SLD280-65型多级水泵性能表 Performance table of model 200SLD280-65 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
6	185	51.4	408	1480	337.0	500	61	2.8	2682
	280	77.8	390		407.4		73	3.7	
	335	93.1	372		452.5		75	5.0	
7	185	51.4	476	1480	393.1	560	61	2.8	2948
	280	77.8	455		475.3		73	3.7	
	335	93.1	434		528.0		75	5.0	
8	185	51.4	544	1480	449.3	630	61	2.8	3213
	280	77.8	520		543.2		73	3.7	
	335	93.1	496		603.3		75	5.0	
9	185	51.4	612	1480	505.5	800	61	2.8	3480
	280	77.8	585		611.1		73	3.7	
	335	93.1	558		678.8		75	5.0	
10	185	51.4	680	1480	561.6	900	61	2.8	3746
	280	77.8	650		679.0		73	3.7	
	335	93.1	620		754.2		75	5.0	

SLD型泵主要技术规范 Main technical regime of model SLD pump

200SLD280-100型泵单级性能曲线图 Single-stage performance curve diagram of model 200SLD280-100 pump

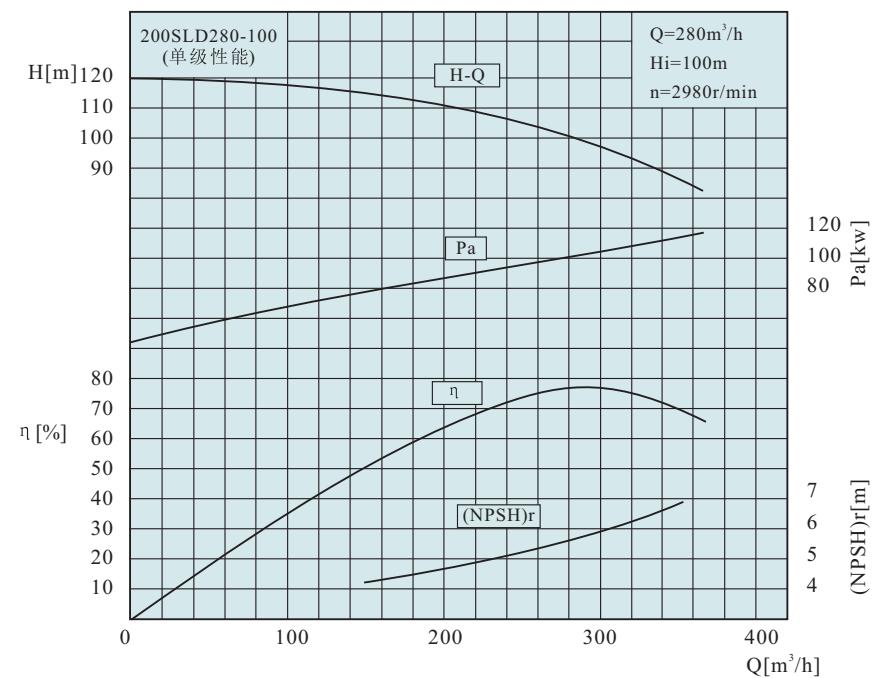


200SLD280-100型多级水泵性能表 Performance table of model 200SLD280-100 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
2	250	69.4	210	2980	193.2	250	74	5.1	1740
	280	77.8	200		198.0		77	5.6	
	300	83.3	196		207.8		77	5.9	
3	250	69.4	315	2980	289.6	400	74	5.1	1920
	280	77.8	300		296.9		77	5.6	
	300	83.3	294		311.8		77	5.9	
4	250	69.4	420	2980	386.3	500	74	5.1	2100
	280	77.8	400		396.3		77	5.6	
	300	83.3	392		416.2		77	5.9	
5	250	69.4	525	2980	483.3	630	74	5.1	2280
	280	77.8	500		495.4		77	5.6	
	300	83.3	490		520.3		77	5.9	
6	250	69.4	630	2980	580.2	710	74	5.1	2460
	280	77.8	600		594.5		77	5.6	
	300	83.3	588		624.2		77	5.9	
7	250	69.4	735	2980	676.6	900	74	5.1	2640
	280	77.8	700		693.6		77	5.6	
	300	83.3	686		728.3		77	5.9	
8	250	69.4	840	2980	773.3	1000	74	5.1	2820
	280	77.8	800		792.7		77	5.6	
	300	83.3	784		832.3		77	5.9	
9	250	69.4	945	2980	869.9	1120	74	5.1	3000
	280	77.8	900		891.8		77	5.6	
	300	83.3	882		936.3		77	5.9	
10	250	69.4	1050	2980	966.6	1250	74	5.1	3180
	280	77.8	1000		990.8		77	5.6	
	300	83.3	980		1040.4		77	5.9	

SLD 单吸多级节段式离心泵
SLD型泵主要技术规范 Main technical regime of model SLD pump

250SLD300-150型泵单级性能曲线图 Single-stage performance curve diagram of model 250SLD300-150 pump

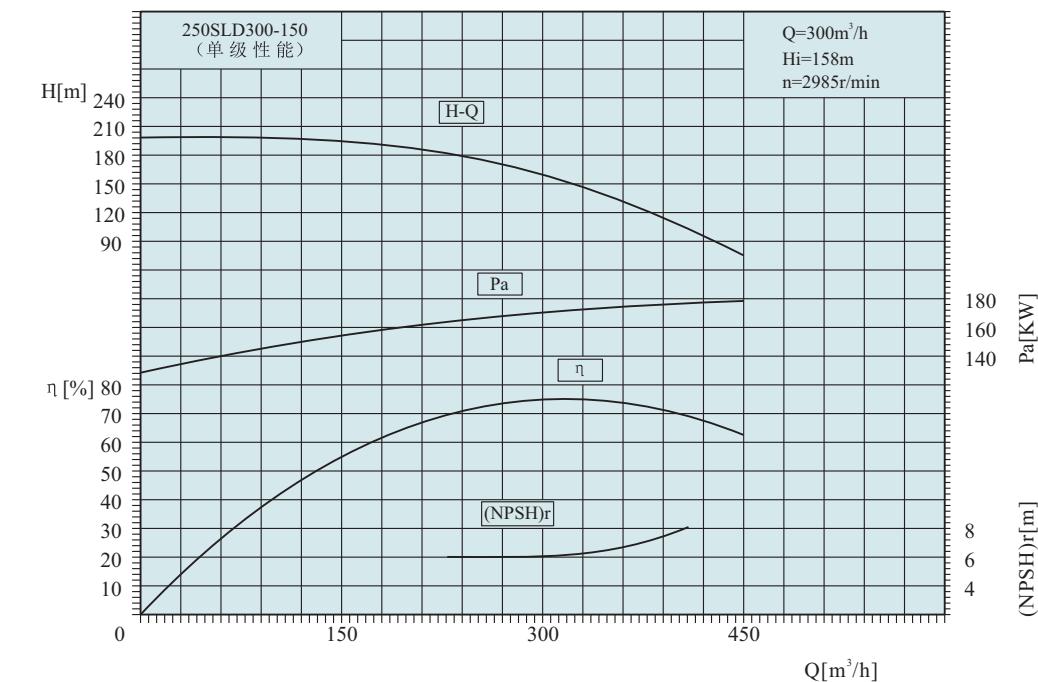


250SLD300-150型多级水泵性能表 Performance table of model 250SLD300-150 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
5	270	75	800	2985	795	1120	74	6	3000
	300	83.5	790		843.7		76.5		
	360	100	745		936.4		78		
6	270	75	960	2985	954	1250	74	6	3300
	300	83.5	948		1012.4		76.5		
	360	100	894		1123.6		78		
7	270	75	1120	2985	1113	1400	74	6	3600
	300	83.5	1106		1181.2		76.5		
	360	100	1043		1311		78		
8	270	75	1280	2985	1272	1600	74	6	3900
	300	83.5	1264		1350		76.5		
	360	100	1192		1498.2		78		
9	270	75	1440	2985	1431	1800	74	6	4200
	300	83.5	1422		1518.6		76.5		
	360	100	1341		1685.5		78		
10	270	75	1600	2985	1590	2000	74	6	4500
	300	83.5	1580		1687.4		76.5		
	360	100	1490		1872.8		78		
11	270	75	1760	2985	1749	2240	74	6	4800
	300	83.5	1738		1856		76.5		
	360	100	1639		2060		78		

SLD型泵主要技术规范 Main technical regime of model SLD pump

250SLD300-150(A)型泵单级性能曲线图 Single-stage performance curve diagram of model 250SLD300-150(A) pump

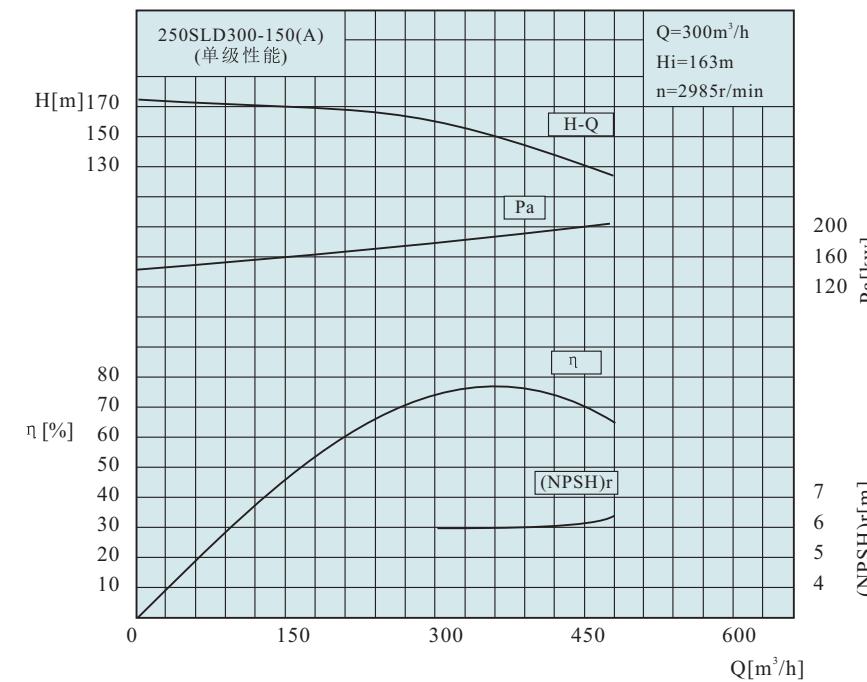


250SLD300-150(A)型多级水泵性能表 Performance table of model 250SLD300-150(A) multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
5	270	75	824	2985	819	1120	74	6	3000
	300	83.5	813		868		76.5		
	360	100	750		943		78		
6	270	75	988	2985	983	1250	74	6	3300
	300	83.5	976		1042		76.5		
	360	100	900		1131		78		
7	270	75	1153	2985	1146	1400	74	6	3600
	300	83.5	1139		1216		76.5		
	360	100	1050		1320		78		
8	270	75	1318	2985	1310	1600	74	6	3900
	300	83.5	1302		1390		76.5		
	360	100	1200		1508		78		
9	270	75	1483	2985	1474	1800	74	6	4200
	300	83.5	1464		1564		76.5		
	360	100	1350		1697		78		
10	270	75	1648	2985	1637	2000	74	6	4500
	300	83.5	1627		1738		76.5		
	360	100	1500		1885		78		
11	270	75	1812	2985	1800	2240	74	6	4800
	300	83.5	1798		1911		76.5		
	360	100	1650		2073		78		

需配稀油站

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP
SLD型泵主要技术规范 Main technical regime of model SLD pump

200SLD360-50型泵单级性能曲线图 Single-stage performance curve diagram of model 200SLD360-50 pump

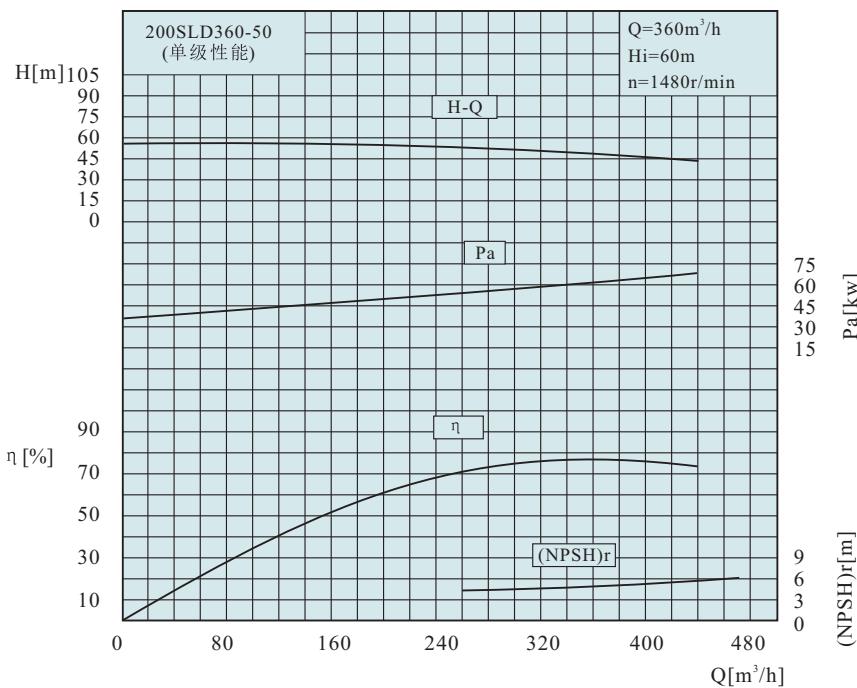


200SLD360-50型多级水泵性能表 Performance table of model 200SLD360-50 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
2	300	83.3	106	1480	115.5	160	75	4.65	676
	360	100	100		125.8		78	4.7	
	440	122.2	92		147		75	5.4	
3	300	83.3	159	1480	173.3	250	75	4.65	807
	360	100	150		188.6		78	4.7	
	440	122.2	138		220.6		75	5.4	
4	300	83.3	212	1480	231	355	75	4.65	938
	360	100	200		251.5		78	4.7	
	440	122.2	184		294.2		75	5.4	
5	300	83.3	265	1480	288.8	400	75	4.65	1069
	360	100	250		314.4		78	4.7	
	440	122.2	230		367.7		75	5.4	
6	300	83.3	318	1480	346.6	500	75	4.65	1200
	360	100	300		377.3		78	4.7	
	440	122.2	276		441.2		75	5.4	
7	300	83.3	371	1480	404.3	630	75	4.65	1331
	360	100	350		440.2		78	4.7	
	440	122.2	322		514.7		75	5.4	
8	300	83.3	424	1480	462.2	710	75	4.65	1462
	360	100	400		503		78	4.7	
	440	122.2	368		588.3		75	5.4	
9	300	83.3	477	1480	520	800	75	4.65	1593
	360	100	450		566		78	4.7	
	440	122.2	414		661.8		75	5.4	
10	300	83.3	530	1480	577.7	800	75	4.65	1724
	360	100	500		628.8		78	4.7	
	440	122.2	460		735.4		75	5.4	
11	300	83.3	583	1480	635.4	900	75	4.65	1855
	360	100	550		692		78	4.7	
	440	122.2	506		809		75	5.4	
12	300	83.3	636	1480	693.2	1000	75	4.65	1986
	360	100	600		754.6		78	4.7	
	440	122.2	552		882.4		75	5.4	

SLD型泵主要技术规范 Main technical regime of model SLD pump

200SLD420-93型泵单级性能曲线图 Single-stage performance curve diagram of model 200SLD420-93 pump

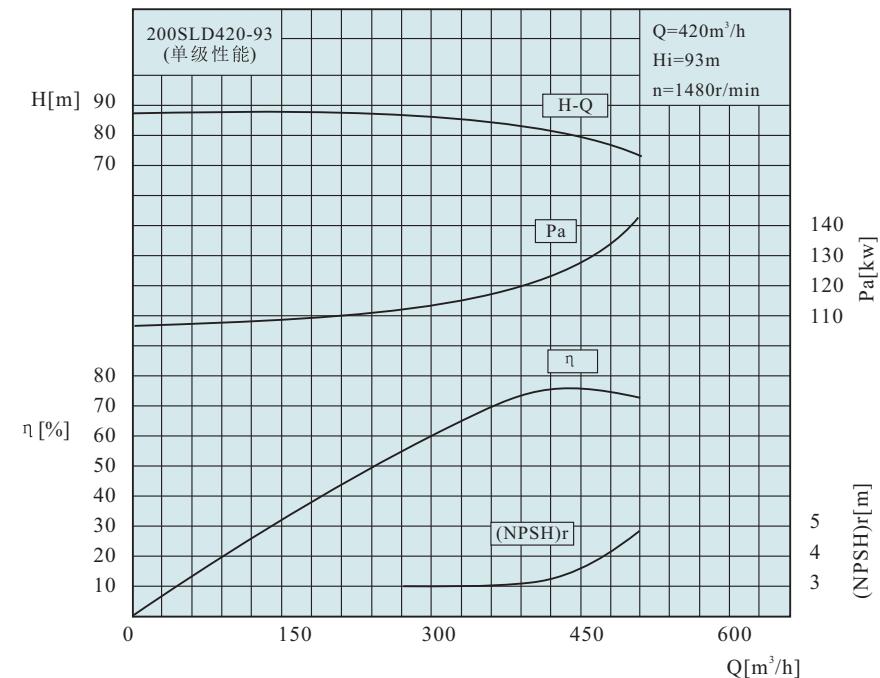


200SLD420-93型多级水泵性能表 Performance table of model 200SLD420-93 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
2	360	100	168.3	1480	239	315	69	3.0	4000
	420	117	163.6		246.1	76	76	3.2	
	480	134	154.7		269.5	75	75	4.2	
3	360	100	267.3	1480	379.8	450	69	3.0	4400
	420	117	260.3		391.7	76	76	3.2	
	480	134	245.7		428.2	75	75	4.2	
4	360	100	366.3	1480	520.5	630	69	3.0	4800
	420	117	356.7		536.8	76	76	3.2	
	480	134	336.7		586.8	75	75	4.2	
5	360	100	465.3	1480	661.1	800	69	3.0	5200
	420	117	453.1		681.9	76	76	3.2	
	480	134	427.7		745.4	75	75	4.2	
6	360	100	564.3	1480	801.8	1000	69	3.0	5600
	420	117	549.5		827	76	76	3.2	
	480	134	518.7		904.1	75	75	4.2	
7	360	100	663.3	1480	942.5	1120	69	3.0	6100
	420	117	645.9		972.1	76	76	3.2	
	480	134	609.7		1062.7	75	75	4.2	
8	360	100	762.3	1480	1083.1	1250	69	3.0	6500
	420	117	742.3		1117.2	76	76	3.2	
	480	134	700.7		1221.3	75	75	4.2	
9	360	100	861.3	1480	1223.8	1400	69	3.0	6900
	420	117	838.3		1262.2	76	76	3.2	
	480	134	791.7		1379.9	75	75	4.2	
10	360	100	960.3	1480	1036.5	1600	69	3.0	7300
	420	117	935.1		1040.3	76	76	3.2	
	480	134	882.7		1538.5	75	75	4.2	
11	360	100	1059.3	1480	1505.1	1800	69	3.0	7700
	420	117	1031.5		1552.4	76	76	3.2	
	480	134	973.7		1697.1	75	75	4.2	
12	360	100	1153.3	1480	1645.8	2000	69	3.0	8100
	420	117	1127.9		1697.5	76	76	3.2	
	480	134	1064.7		1855.7	75	75	4.2	

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP

250SLD450-60型泵单级性能曲线图 Single-stage performance curve diagram of model 250SLD450-60 pump

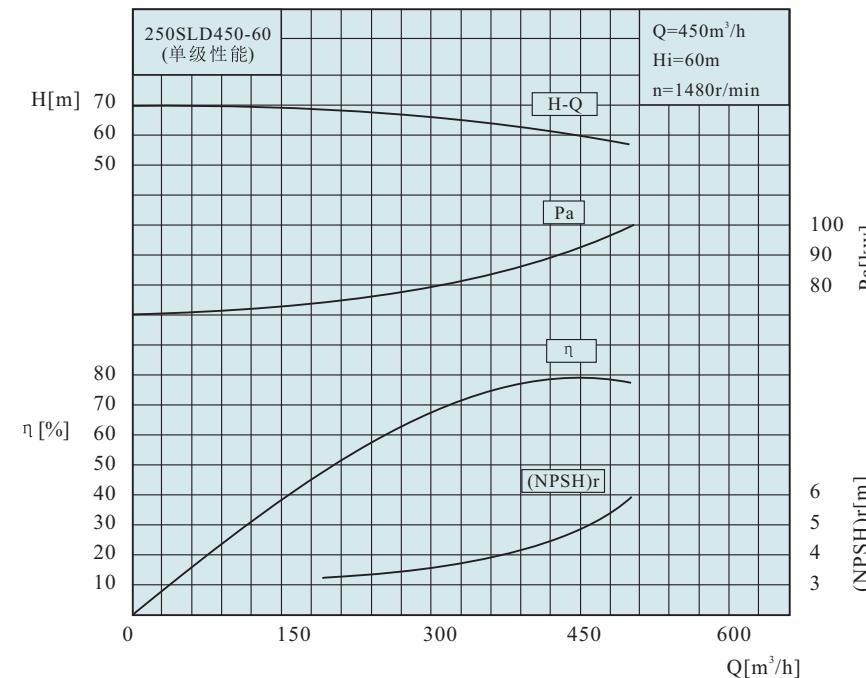


250SLD450-60型多级水泵性能表 Performance table of model 250SLD450-60 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
2	335	93.1	1480	130	164.7	250	72	3.8	1846
	450	125		120	186.0	76	79	4.9	
	500	139		114	199.0	78	6.0		
3	335	93.1	1480	195	247.1	355	72	3.8	2138
	450	125		180	279.2	76	79	4.9	
	500	139		170	298.5	78	6.0		
4	335	93.1	1480	260	329.4	450	72	3.8	2437
	450	125		240	372.3	76	79	4.9	
	500	139		228	398	78	6.0		
5	335	93.1	1480	325	411.8	560	72	3.8	2746
	450	125		300	465.4	76	79	4.9	
	500	139		285	497.5	78	6.0		
6	335	93.1	1480	390	494.2	630	72	3.8	3054
	450	125		360	558.5	76	79	4.9	
	500	139		342	597	78	6.0		
7	335	93.1	1480	455	576.5	800	72	3.8	3362
	450	125		420	651.5	76	79	4.9	
	500	139		399	696.5	78	6.0		
8	335	93.1	1480	520	658.9	900	72	3.8	3670
	450	125		480	744.6	76	79	4.9	
	500	139		456	796	78	6.0		
9	335	93.1	1480	585	741.2	1000	72	3.8	3978
	450	125		540	837.7	76	79	4.9	
	500								

SLD型泵主要技术规范 Main technical regime of model SLD pump

250SLD500-57型泵单级性能曲线图 Single-stage performance curve diagram of model 250SLD500-57 pump

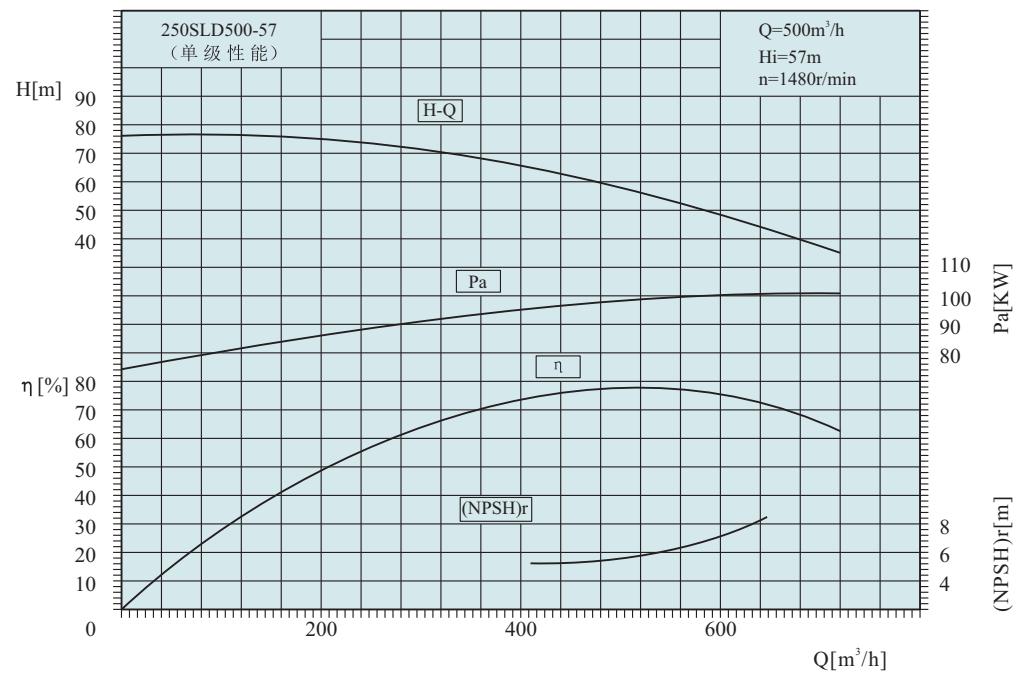


250SLD500-57型多级水泵性能表 Performance table of model 250SLD500-57 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
2	425	118	124	1480	191.2	250	75	4.6	1700
	500	139	114		196.6	77	6.0	6.0	
	600	167	100		212.5	77	7.0	7.0	
3	425	118	186	1480	286.9	355	75	4.6	1950
	500	139	171		294.6	77	6.0	6.0	
	600	167	150		318.2	77	7.0	7.0	
4	425	118	248	1480	382.8	450	75	4.6	2300
	500	139	228		392.8	77	6.0	6.0	
	600	167	200		424.2	77	7.0	7.0	
5	425	118	310	1480	478.2	560	75	4.6	2600
	500	139	285		491.0	77	6.0	6.0	
	600	167	250		530.3	77	7.0	7.0	
6	425	118	372	1480	573.8	710	75	4.6	2900
	500	139	342		589.2	77	6.0	6.0	
	600	167	300		636.4	77	7.0	7.0	
7	425	118	434	1480	669.5	800	75	4.6	3200
	500	139	399		687.4	77	6.0	6.0	
	600	167	350		742.4	77	7.0	7.0	
8	425	118	496	1480	765.1	900	75	4.6	3500
	500	139	456		785.7	77	6.0	6.0	
	600	167	400		848.5	77	7.0	7.0	
9	425	118	558	1480	860.7	1000	75	4.6	4700
	500	139	513		883.8	77	6.0	6.0	
	600	167	450		945.5	77	7.0	7.0	
10	425	118	620	1480	956.4	1120	75	4.6	4100
	500	139	570		982.1	77	6.0	6.0	
	600	167	500		1060.6	77	7.0	7.0	
11	425	118	682	1480	1051.5	1250	75	4.6	4400
	500	139	627		1081.1	77	6.0	6.0	
	600	167	550		1169.2	77	7.0	7.0	

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP

300SLD600-60型泵单级性能曲线图 Single-stage performance curve diagram of model 300SLD600-60 pump

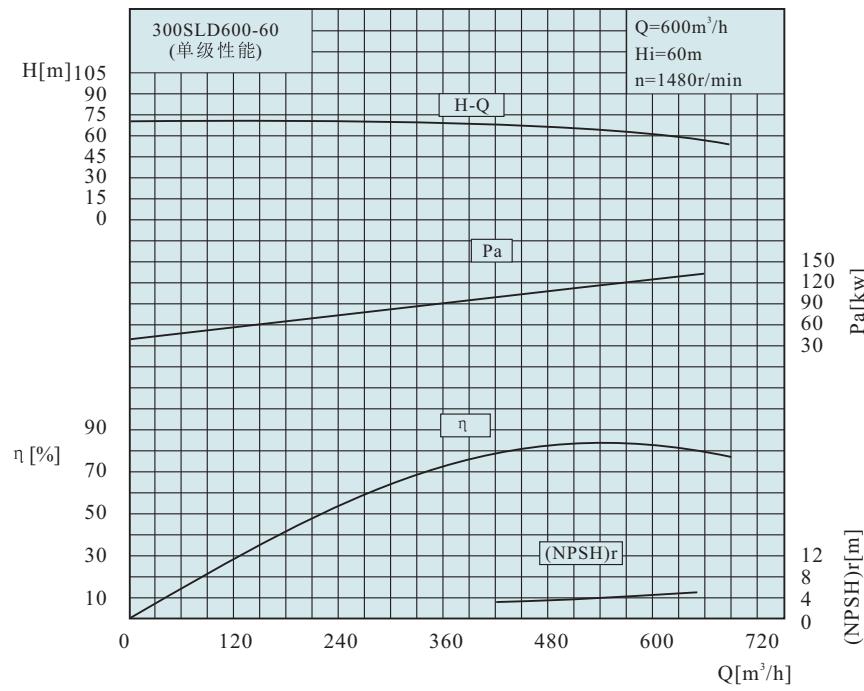


300SLD600-60型多级水泵性能表 Performance table of model 300SLD600-60 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
2	450	125	1480	130	201.4	280	79	4.0	1750
	600	166.6		120	238.8	241.6	82	4.8	
	638	177.2		110	241.6		79	5.2	
3	450	125	1480	195	321.6	450	79	4.0	1950
	600	166.6		180	328.2	362.4	82	4.8	
	638	177.2		165	362.4		79	5.2	
4	450	125	1480	260	428.8	560	79	4.0	2260
	600	166.6		240	477.6	560	82	4.8	
	638	177.2		220	483.2	560	79	5.2	
5	450	125	1480	325	536	710	79	4.0	2570
	600	166.6		300	597	710	82	4.8	
	638	177.2		275	604	710	79	5.2	
6	450	125	1480	390	643.2	800	79	4.0	2880
	600	166.6		360	716.4	800	82	4.8	
	638	177.2		330	724.8	800	79	5.2	
7	450	125	1480	455	750.4	900	79	4.0	3190
	600	166.6		420	835.8	900	82	4.8	
	638	177.2		385	845.6	900	79	5.2	
8	450	125	1480	520	857.6	1120	79	4.0	3500
	600	166.6		480	955.2	1120	82	4.8	
	638	177.2		440	966.4	1120	79	5.2	
9	450	125	1480	585	964.8	1250	79	4.0	3810
	600	166.6		540	1074.6	1250	82	4.8	
	638	177.2		495	1087.2	1250	79	5.2	
10	450	125	1480	650	1072	1250	79	4.0	4120
	600	166.6		600	1194	1250	82	4.8	
	638	177.2		550	1208	1250	79	5.2	

SLD型泵主要技术规范 Main technical regime of model SLD pump

300SLD720-60型泵单级性能曲线图 Single-stage performance curve diagram of model 300SLD720-60 pump

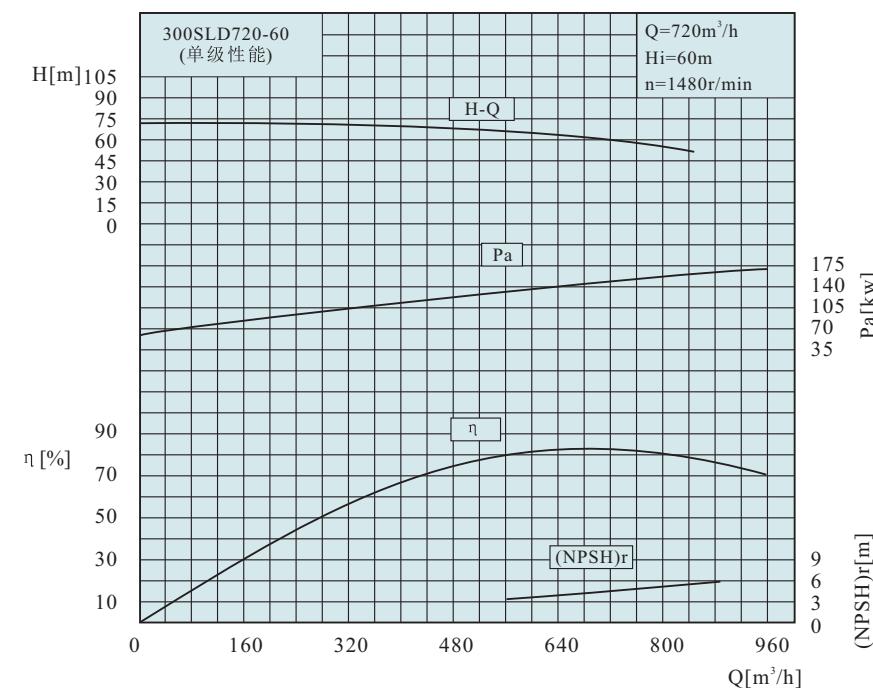



300SLD720-60型多级水泵性能表 Performance table of model 300SLD720-60 multi-stage water pump

级数 No of stage	流量 Capacity		扬程 Head (m)	转速 Speed (r/min)	功率 Power (kW)		效率 Efficiency (%)	必需汽蚀余量 (NPSH)r (m)	重量 Weight (kg)
	(m³/h)	(L/s)			轴功率 shaft power	电机功率 Motor power			
2	550	152.8	132	1480	260	355	76	3.5	1830
	720	200	120		294		80	4.5	
	850	236	108		318.4		78.5	5.5	
3	550	152.8	198	1480	390	560	76	3.5	2040
	720	200	180		441		80	4.5	
	850	236	162		477.6		78.5	5.5	
4	550	152.8	264	1480	520	710	76	3.5	2350
	720	200	240		588		80	4.5	
	850	236	216		636.8		78.5	5.5	
5	550	152.8	330	1480	640	800	76	3.5	2650
	720	200	300		735		80	4.5	
	850	236	270		796		78.5	5.5	
6	550	152.8	396	1480	780	1000	76	3.5	2960
	720	200	360		882		80	4.5	
	850	236	324		955.2		78.5	5.5	
7	550	152.8	462	1480	910	1250	76	3.5	3280
	720	200	420		1029		80	4.5	
	850	236	378		1114.4		78.5	5.5	
8	550	152.8	528	1480	1040	1400	76	3.5	3595
	720	200	480		1176		80	4.5	
	850	236	432		1273.6		78.5	5.5	
9	550	152.8	594	1480	1170	1600	76	3.5	3900
	720	200	540		1323		80	4.5	
	850	236	486		1432.8		78.5	5.5	

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP

SLD型泵的外形及安装尺寸 External and erection dimensions of model SLD pump

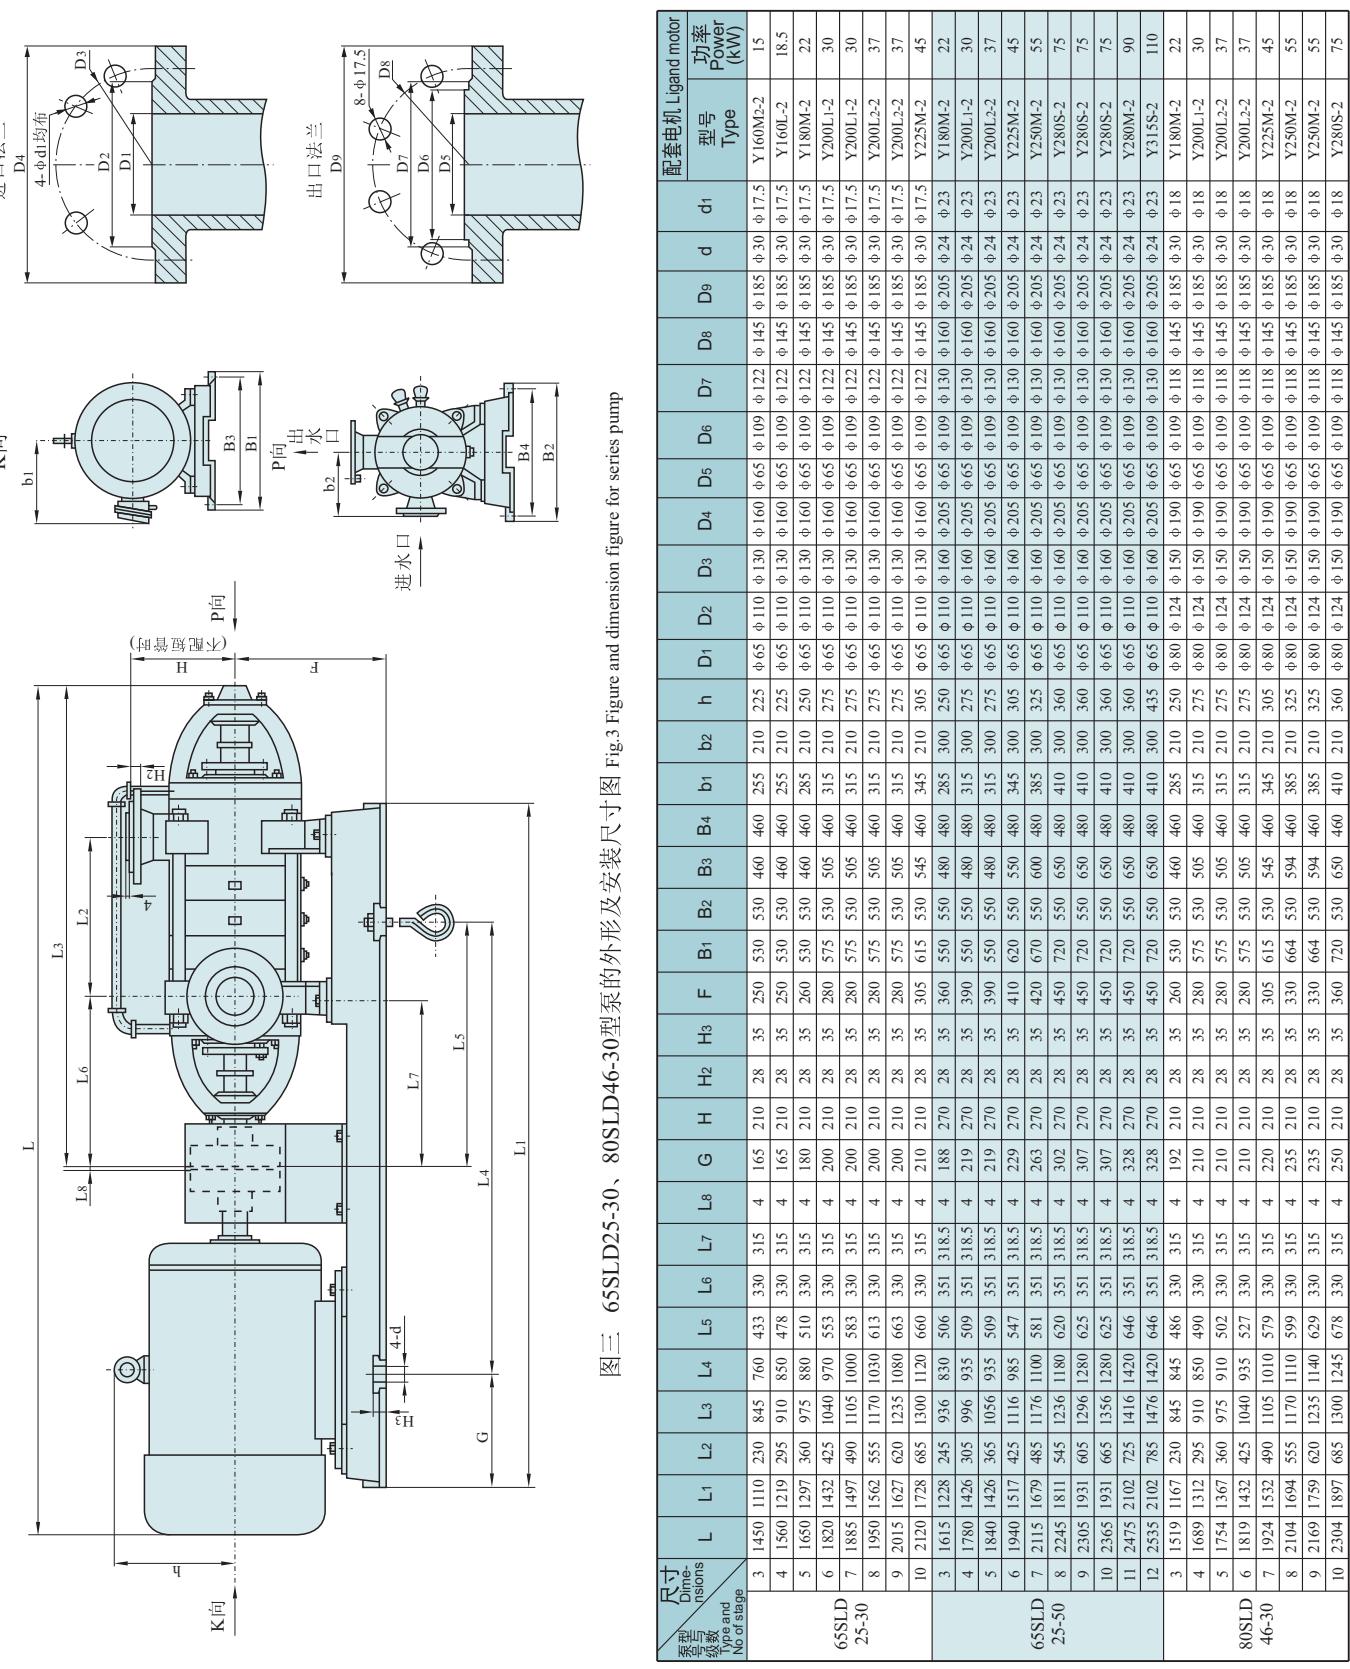


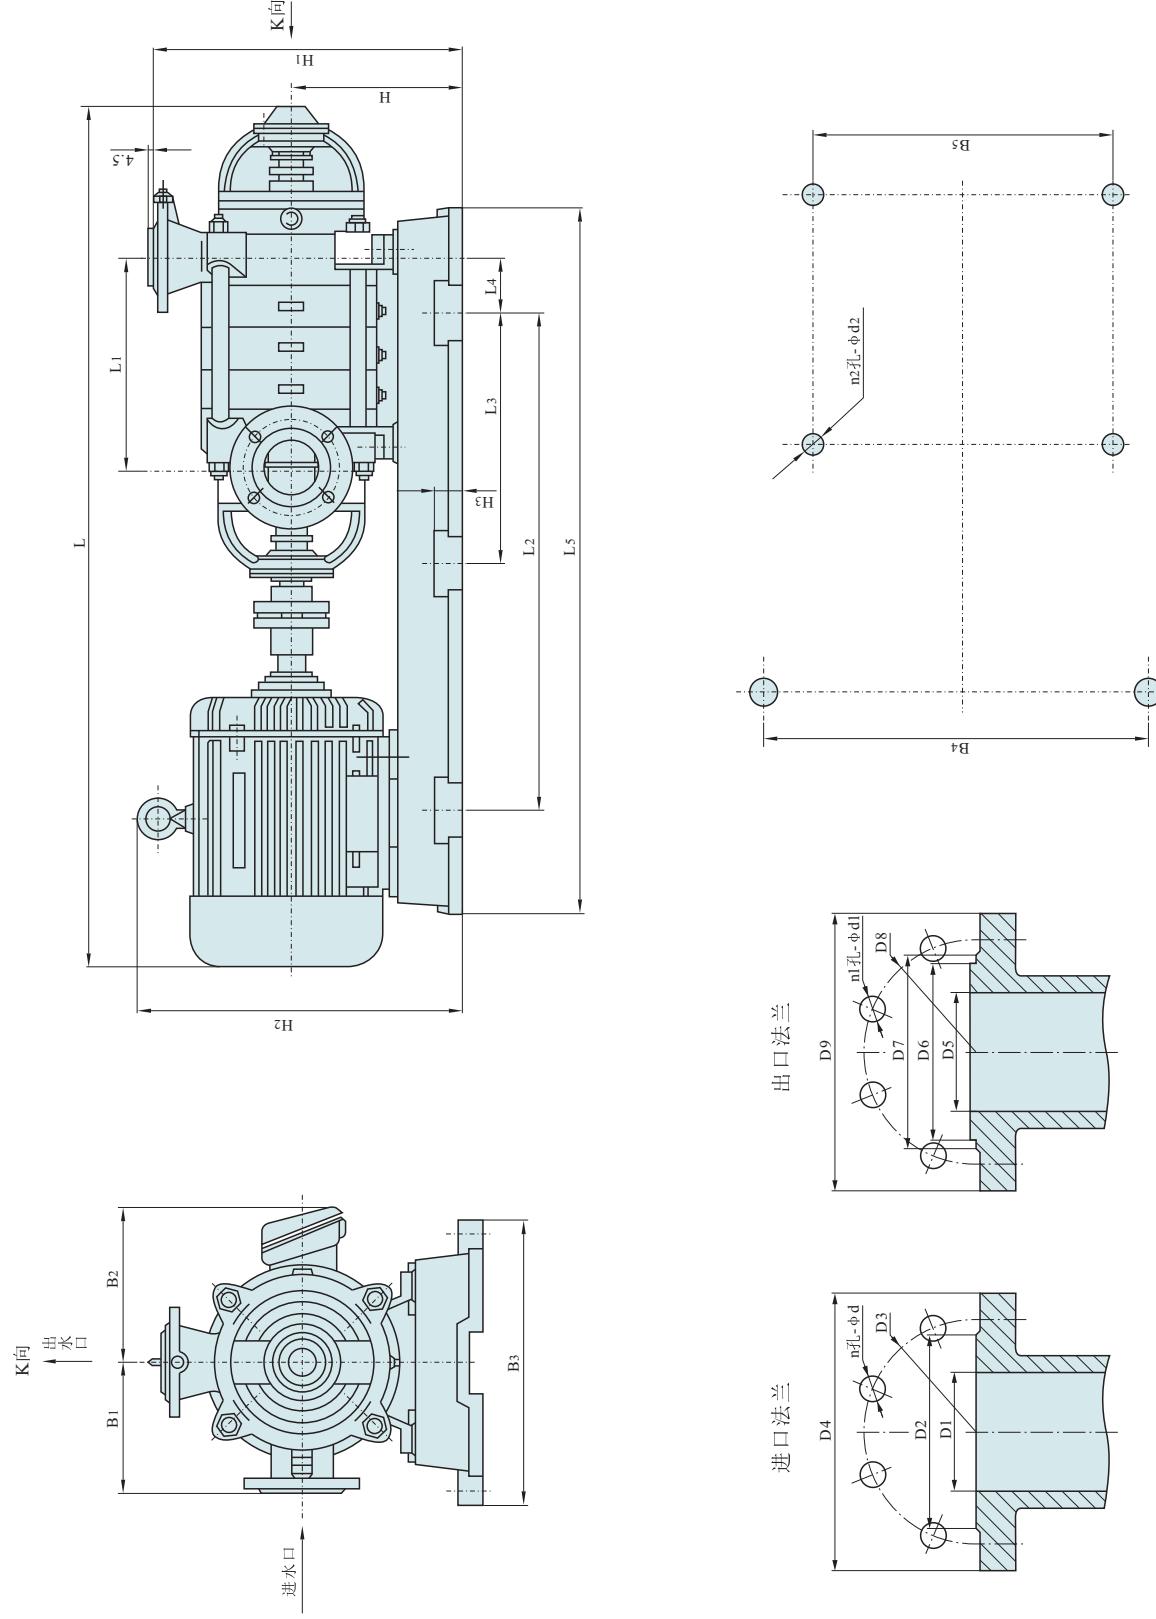SLD型泵的外形及安装尺寸 External and erection dimensions of model SLD pump


图四 80SLD46-50、100SLD85-45、150SLD155-30型泵的外形及安装尺寸图(泵和电机共同底座 见图四) Fig.4 Figure and dimension figure for series pump(pump and motor together bed see figure 4)

SLD SINGLE-SUCTION MULTI-STAGE SECTIONAL-TYPE CENTRIFUGAL PUMP

泵型号 Pump No. of stage type	尺寸 Dimensions of series type	L	L ₁	L ₂	L ₃	L ₄	L ₅	B ₁	B ₂	B ₃	B ₄	B ₅	H	H ₁	H ₂	H ₃	D ₁	D ₂	D ₃	D ₄	D ₅	D ₆	D ₇	D ₈	配套电机 Ligand motor 功率 Power kW		型号 Type				
3	1717	245	800	-	167.5	1330	300	310	590	530	400	650	635	50	φ80	φ124	φ150	φ190	φ80	φ120	φ133	φ170	φ215	4-Φ19	8-Φ22	4-Φ24	Y200L2-2	37			
4	1817	305	925	-	152.5	1415	300	345	614	550	500	420	670	725	50	φ80	φ124	φ150	φ190	φ80	φ120	φ133	φ170	φ215	4-Φ19	8-Φ22	4-Φ24	Y225M-2	45		
5	1992	365	1020	-	182.5	1571	300	385	670	600	500	420	670	745	60	φ80	φ124	φ150	φ190	φ80	φ120	φ133	φ170	φ215	4-Φ19	8-Φ22	4-Φ24	Y250M-2	55		
6	2122	425	1130	565	162.5	1758	300	410	720	650	500	420	670	780	60	φ80	φ124	φ150	φ190	φ80	φ120	φ133	φ170	φ215	4-Φ19	8-Φ22	6-Φ24	Y280S-2	75		
80SLD 46-50		7	2232	485	1130	565	222.5	1758	300	410	720	650	500	420	670	780	60	φ80	φ124	φ150	φ190	φ80	φ120	φ133	φ170	φ215	4-Φ19	8-Φ22	6-Φ24	Y280M-2	90
8	2292	545	1180	590	232.5	1869	300	410	720	650	500	420	670	780	60	φ80	φ124	φ150	φ190	φ80	φ120	φ133	φ170	φ215	4-Φ19	8-Φ22	6-Φ24	Y280M-2	90		
9	2577	605	1330	665	187.5	2046	300	576	820	750	500	515	760	960	60	φ80	φ124	φ150	φ190	φ80	φ120	φ133	φ170	φ215	4-Φ19	8-Φ22	6-Φ24	Y315S-2	110		
10	2637	665	1330	665	247.5	2046	300	576	820	750	500	515	760	960	60	φ80	φ124	φ150	φ190	φ80	φ120	φ133	φ170	φ215	4-Φ19	8-Φ22	6-Φ24	Y315S-2	110		
11	2762	725	1480	740	197.5	2222	300	576	820	750	500	515	760	960	60	φ80	φ124	φ150	φ190	φ80	φ120	φ133	φ170	φ215	4-Φ19	8-Φ22	6-Φ24	Y315M-2	132		
12	2822	785	1480	740	257.5	2222	300	576	820	750	500	515	760	960	60	φ80	φ124	φ150	φ190	φ80	φ120	φ133	φ170	φ215	4-Φ19	8-Φ22	6-Φ24	Y315M-2	132		
2	1603	203	850	-	104	1263	250	315	580	520	320	325	575	600	40	φ100	φ148	φ170	φ210	φ100	φ149	φ158	φ190	φ235	4-Φ17.5	8-Φ22	4-Φ24	Y200L2-2	37		
3	1842	277	1040	-	130	1468	250	385	675	615	520	365	615	690	40	φ100	φ148	φ170	φ210	φ100	φ149	φ158	φ190	φ235	4-Φ17.5	8-Φ22	4-Φ24	Y250M-2	55		
4	1986	351	1060	530	172	1615	250	410	730	670	520	395	645	755	40	φ100	φ148	φ170	φ210	φ100	φ149	φ158	φ190	φ235	4-Φ17.5	8-Φ22	6-Φ24	Y280S-2	75		
5	2110	425	1120	560	202	1740	250	410	730	670	520	395	645	755	40	φ100	φ148	φ170	φ210	φ100	φ149	φ158	φ190	φ235	4-Φ17.5	8-Φ22	6-Φ24	Y280M-2	90		
100 SLD 85-45	3	1842	277	1040	-	130	1468	250	385	675	615	520	365	615	690	40	φ100	φ148	φ170	φ210	φ100	φ149	φ158	φ190	φ235	4-Φ17.5	8-Φ22	4-Φ24	Y250M-2	55	
150 SLD 155-30	2	2042	310	1060	530	67.5	1550	350	385	650	580	430	775.5	755	50	φ150	φ211	φ240	φ285	φ150	φ203	φ211	φ250	φ300	8-Φ22	8-Φ26	6-Φ30	Y280M-4	55		
3	2227	425	1260	630	104.5	1895	350	410	710	640	580	430	775.5	790	50	φ150	φ211	φ240	φ285	φ150	φ203	φ211	φ250	φ300	8-Φ22	8-Φ26	6-Φ30	Y280S-4	75		
4	2392	540	1260	630	189.5	350	410	710	640	580	430	775.5	790	50	φ150	φ211	φ240	φ285	φ150	φ203	φ211	φ250	φ300	8-Φ22	8-Φ26	6-Φ30	Y280M-4	90			

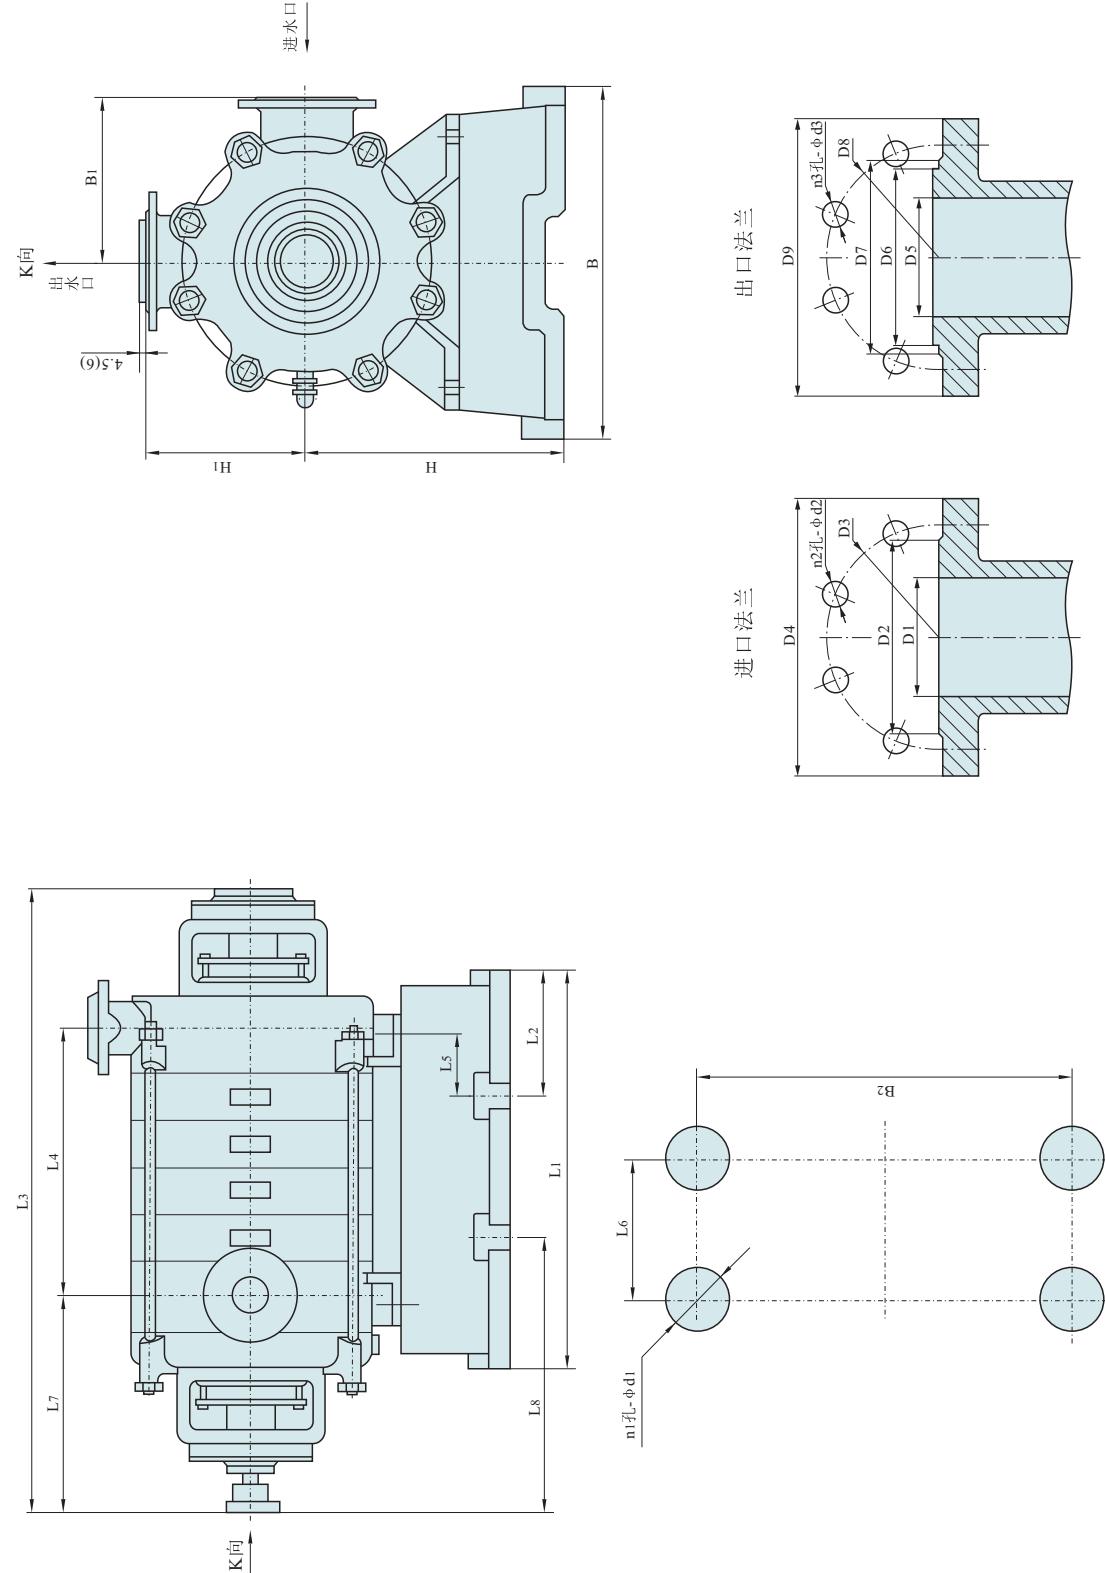SLD型泵的外形及安装尺寸 External and erection dimensions of model SLD pump


图五 100SLD85-45、100SLD85-67、100SLD85-80、200SLD150-100、150SLD155-30、
150SLD155-67、200SLD280-43、200SLD280-65、200SLD280-100、250SLD450-60、250SLD500-57
型泵的外形及安装尺寸图 Fig.5 Figure and dimension figure for series pump

注：括号内数字为250SLD250-150、250SLD300-150、250SLD300-150(A)相应尺寸数值。
Note: the numerals in the bracket are the values of the dimensions corresponded to 250SLD250-150、250SLD300-150(A)、250SLD300-150(A).

表3 SLD型泵的外形及安装尺寸(单泵底座 见图五) Table3 Series pump figure and dimension table (pump foundation see figure 5)

泵型号 Pump series No. of stage	尺寸 Dimensions												配套电机 Ligand motor Type	功率 Power kW	电压 Voltage V					
	L1	L2	L3	L4	L5	L6	L7	L8	B	B1	H	D1	D2	D3	D4	D5	D6	D7	D8	D9
100SLD 85-45	6	683	190	1128	499	121	303	324	428	580	250	520	345	250	φ100	φ148	φ170	φ210	φ149	φ158
	7	757	190	1202	573	121	377	324	428	580	250	520	345	250	φ100	φ148	φ170	φ210	φ149	φ158
	8	831	190	1276	647	121	451	324	428	580	250	520	345	250	φ100	φ148	φ170	φ210	φ149	φ158
	9	905	190	1350	721	121	525	324	428	580	250	520	345	250	φ100	φ148	φ170	φ210	φ149	φ158
100SLD 85-80	3	765	182	1304	310	-13	400	515	541	670	360	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	4	765	182	1384	390	31	400	515	585	670	360	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	5	765	182	1464	470	75	400	515	629	670	360	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	6	945	182	1544	550	27	580	515	585	670	360	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
100SLD 85-80	7	945	182	1624	630	71	580	515	629	670	360	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	8	1125	182	1704	710	27	760	515	581	670	360	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	9	1125	182	1784	790	71	760	515	625	670	360	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	10	1305	182	1864	870	27	940	515	585	670	360	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	11	1305	182	1944	950	71	940	515	629	670	360	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	12	1485	182	2024	1030	27	1120	515	585	670	360	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	3	765	182	1452	480	-13	400	517	541	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	4	765	182	1557	585	31	400	517	585	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
200SLD	5	765	182	1662	690	75	400	517	529	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	6	945	182	1767	795	27	580	517	585	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	7	945	182	1872	900	71	580	517	629	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	8	1125	182	1977	1005	27	760	517	581	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	9	1125	182	2082	1110	71	760	517	625	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	10	1305	182	2187	1215	27	940	517	585	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	3	765	182	1407	371	-13	400	517	541	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	4	765	182	1495	459	31	400	517	585	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	5	765	182	1583	547	75	400	517	529	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
150SLD 155-67	6	945	182	1671	635	27	580	517	585	670	570	600	420	355.5	φ100	φ155	φ180	φ220	φ149	φ172
	7	945	182	1759	723	71	580	557	629	670	570	600	420	350	φ150	φ202	φ225	φ265	φ150	φ203
	8	1125	182	1847	811	27	760	557	581	670	570	600	420	350	φ150	φ202	φ225	φ265	φ150	φ203
	9	1125	182	1935	899	71	760	557	625	670	570	600	420	350	φ150	φ202	φ225	φ265	φ150	φ203
	5	1030	175	1452	660	-50	680	430	524	670	350	600	430	345.5	φ150	φ211	φ240	φ285	φ150	φ203
	6	1030	175	1567	775	7.5	680	430	524	670	350	600	430	345.5	φ150	φ211	φ240	φ285	φ150	φ203
	7	1030	175	1682	890	65	680	430	524	670	350	600	430	345.5	φ150	φ211	φ240	φ285	φ150	φ203
	8	1375	175	1797	1005	-50	1025	430	524	670	350	600	430	345.5	φ150	φ211	φ240	φ285	φ150	φ203
	9	1375	175	1912	1120	7.5	1025	430	524	670	350	600	430	345.5	φ150	φ211	φ240	φ285	φ150	φ203
	10	1375	175	2027	1235	65	1025	430	524	670	350	600	430	345.5	φ150	φ211	φ240	φ285	φ150	φ203

注：括号内数值为该型号泵使用滚动轴承时的尺寸。 Note: the numerals in the bracket are the sizes of the rolling bearing used with the pump of

表4 SLD型泵的外形及安装尺寸(单泵底座 见图五) Table4 Series pump figure and dimension table (pump foundation see figure 5)

泵型号 Pump type	L ₁ 尺寸 Dimensions No. of stage	L ₂	L ₃	L ₄	L ₅	L ₆	L ₇	L ₈	B	B ₁	B ₂	H	H ₁	D ₁	D ₂	D ₃	D ₄	D ₅	D ₆	D ₇	D ₈	D ₉	n ₁ Φ ₁ ·Φ ₂ ·d ₁ n ₂ Φ ₂ ·Φ ₃ d ₂ n ₃ Φ ₃ ·Φ ₄ d ₃	配套电机 Ligand motor 功率 Power (kW)	电压 Voltage (V)						
2	605	152.5	1173	379	-2.5	300	412	474.5	810	450	400	φ200	φ265	φ295	φ341	φ200	φ259	φ282	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y315S-4	110	380					
3	605	152.5	1303	509	62.5	300	412	539.5	810	450	400	φ200	φ265	φ295	φ341	φ200	φ259	φ282	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y315Li-4	160	380					
4	865	182.5	1433	639	275	500	412	504.5	810	500	400	φ200	φ265	φ295	φ341	φ200	φ259	φ282	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y315Lz-4	200	380					
5	865	182.5	1563	769	92.5	500	412	569.5	810	450	740	500	400	φ200	φ265	φ295	φ341	φ200	φ259	φ282	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y335M-4	250	380			
6	1125	207.5	1693	899	52.5	710	412	529.5	810	450	740	500	400	φ200	φ265	φ295	φ341	φ200	φ259	φ282	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y353A-4	315	6000			
7	1125	207.5	1823	1029	117.5	710	412	504.5	810	450	740	500	400	φ200	φ265	φ295	φ341	φ200	φ259	φ282	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4001-4	355	6000			
8	1385	217.5	1953	1159	62.5	950	412	539.5	810	450	740	500	400	φ200	φ265	φ295	φ341	φ200	φ259	φ282	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4002-4	800	6000			
9	1385	217.5	2083	1289	127.5	950	412	604.5	810	450	740	500	400	φ200	φ265	φ295	φ341	φ200	φ259	φ282	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4003-4	450	6000			
10	1600	190	2546	1385	70	1220	625	710	870	500	790	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ282	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4004-4	900	6000			
11	1600	190	2546	1289	70	700	625	710	870	500	790	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ282	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4005-4	900	6000			
12	1815	180	1362	360	-75	675	514	558	945	500	875	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4006-4	500	6000			
13	815	180	1482	480	-15	675	514	558	945	500	875	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4007-4	560	6000			
14	815	180	1602	600	45	675	514	558	945	500	875	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4501-4	630	6000			
15	1055	180	1722	720	27.5	735	514	548	945	500	875	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4002-4	630	6000			
16	1055	180	1842	840	95	735	514	608	945	500	875	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4503-4	800	6000			
17	1295	230	1962	960	87.5	835	514	601.5	945	500	875	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4003-4	250	6000			
18	1295	230	2082	1080	145	835	514	658	945	500	875	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4504-4	315	6000			
19	1535	180	2202	1200	35	875	514	548	945	500	875	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4004-2	1120	6000			
20	2005LD	6	1100	100	1915	960	-16	900	480	490	790	500	750	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4501-2	710	6000	
21	2005LD	7	1240	100	2055	1100	-16	1140	510	520	790	500	750	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4502-2	600	6000	
22	360-50	8	1380	120	2225	1240	-16	1140	510	520	790	500	750	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4503-2	900	6000	
23	360-50	9	1595	150	2867	1232	6	585	850	816	1245	650	1165	755	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4504-4	315	6000
24	360-50	10	1737	150	3009	1374	6	1437	850	816	1245	650	1165	755	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4505-4	630	6000
25	360-50	11	1879	150	3151	1516	6	1579	850	816	1245	650	1165	755	530	495.5	φ200	φ268	φ295	φ340	φ200	φ259	φ285	φ320	φ375	4-Φ-30	8-Φ-22	12-Φ-30	Y4506-4	300	6000
26	360-50	12	1940	125	2785	1800	6	1040	510	520	790	500	750</td																		

管路损耗参考表 Reference table for pipeline loss

管径 diameter (mm)	流 量 Capacity (L/s)				
	1	2	4	6	8
25	32.7	13.0			
38	3.5	14	55		
50	0.8	3.1	13	29	
65		1.6	3.2	7.1	13
75		0.4	0.8	3.3	5.9
100		0.23	0.8	1.3	2.1
125		0.11	0.23	0.4	0.63
150		0.16	0.26	0.58	1.1
175		0.11	0.27	0.5	0.74
200		0.13	0.26	0.37	0.53
250		0.07	0.12	0.18	0.30
300		0.07	0.12	0.19	0.27
					40
					25
					30
					50
					70
					90
					110
					120
					130
					140
					160
					180
					200
					240
					300

直管摩擦损失简表(供估计用)100m直管损失米数以新铸铁管为标准, 直管加倍。
 Brief table for the frictional loss of a straight pipe(for evaluation), the lost meters of a 100m straight pipe takes the newly cast iron pipe as the standard and multiple for the old one.

阀及弯管折合直管长度(每个)

The length of a straight pipe converted into both valve and elbow(each)

The length of a straight pipe converted into both valve and elbow(each)

一定管路直径之最大流量限制

Limit of the maximum flow for a pipe with a certain diameter

种 类 Variety	折合直管直径倍数 Convert into the times of the diameter of a straight pipe	备 注 Remark	管路直径 Pipeline diameter (mm)	最大流量 Maximum flow (L/s)	最大流速 Maximum flow rate (m/s)	管路直径 Pipeline diameter (mm)	最大流量 Maximum flow (L/s)	最大流速 Maximum flow rate (m/s)
标准弯管 Standard elbow	12	未敞开加倍 Multiple in case of unopen	25	1	2.04	125	30.0	2.44
全开闸阀 Fully opened gate valve	25		38	2.5	1.69	150	43.0	2.45
逆止阀 Back valve	100		50	4.17	2.12	175	60.0	2.49
底阀 Foot valve	100	部分堵塞加倍 Partial block-up multiplied	65	6.67	2.01	200	83.3	2.69
			75	10.0	2.26	250	133.0	2.72
			100	18.4	2.33	300	192.0	2.71

注: 例如100mm直管, 底阀折合100倍直径等于 $100 \times 100 = 10000\text{mm} = 10\text{m}$ 直径
 长度, 假定流量为 8L/s 查上表, 直管每 100m 损失 1.3m , 则 10m 损失 0.13m , 即
 一个100mm底阀, 流量为 8L/s 时, 则损失扬程 0.13m 。

Note: For instance a 100mm diameter pipe, the foot valve has a $100 \times 100 = 10000\text{mm} = 10\text{m}$ diameter
 when which is converted into 100 times that of the pipe's diameter. Suppose the flow is 8L/s ,
 looked into the above table, the loss of the straight pipe is 1.3m each 100m , then the one for
 100mm is 0.13m , that is, for a 100mm foot valve with a flow 8L/s , its head loss is 0.13m .

注: 超过此限使管路损失显著增加。
 Note: The pipeline loss would be made greatly increased once the limit is over.